gorenjegroup

TILE BOOK 2020

gorenje KERAMIKA

gorenje KERAMIKA

Gorenje Keramika, d.o.o.

Sedež/Headquarters: Partizanska cesta 12, 3320 Velenje, Slovenija
Lokacija/Location: Gorenje 1/b, 3327 Šmartno ob Paki, Slovenija
T: +386 (0)3 896 61 10
F: +386 (0)3 896 61 13
E: keramika@gorenje.com
W: https://si.gorenje.com/izdelki/keramika
https://ceramics.gorenje.com/en/

TRADICIJA 45 LET
45 years of tradition

Priznana blagovna znamka v regiji
S 45-letnimi izkušnjami je Gorenje Keramika vodilno podjetje na domačem trgu in eden od najbolj prepoznavnih ponudnikov na trgih v regiji srednje in vzhodne Evrope.

Širok izbor izdelkov
Gorenje Keramika je podjetje za razvoj, proizvodnjo in distribucijo keramičnih ploščic. Prodajni asortiman obsega:
- talne in stenske ploščice vključno z dekoracijo (sredinski dekorji, listelli, mozaiki) za oblaganje površin notranjih prostorov in
- mrazoodporne porcelanske ploščice (t.i. 'gres porcellanato') primerne za najzahtevnejše pogoje v notranjih in zunanjih prostorih.

Razvojna usmeritev
Razvoj podjetja je usmerjen v zadovoljstvo kupcev in tehnološke inovacije. S takšnim pristopom si Gorenje Keramika utrjuje prepoznavnost ter krepi konkurenčnost na ciljnih trgih.

V zadnjih treh letih smo v Gorenje Keramika investirali v najsodobnejše tehnologije v proizvodnji keramičnih ploščic. Zato vam novi katalog izdelkov Gorenje Keramika ponuja moderen prodajni asortiman, ki je namenjen nenehnemu izboljševanju in zadovoljevanju najzahtevnejših potreb trga in kupcev.

Trajnostni razvoj
Zavezanost podjetja varovanju in ohranjanju okolja izhaja iz prepričanja, da je trajnostni razvoj obveznost za vse nas.

Zelene ploščice Gorenje Keramika pomenijo našo zavezanost trajnostnemu razvoju okolja, prisotno v vsakem izdelku in vseh fazah proizvodnje, vključno z distribucijo in življenjskim ciklom izdelka.

Recognized trademark in the region
With 45 years of experience, the company Gorenje Keramika is the leading company in the domestic market and one of the most recognizable suppliers in the markets of Central and Eastern Europe.

Wide range of products
Gorenje Keramika is a company engaged in design, production, and distribution of ceramic tiles. Its range of products includes:
- floor and wall tiles including decorations (central decors, listellos, mosaics) for indoor surfaces and
- frost-resistant porcelain tiles (the so-called 'gres porcellanato') suitable for the most demanding conditions in indoor and outdoor spaces.

Development policy
The development of the company is aimed at customer satisfaction and technological innovation. With such approach, Gorenje Keramika is strengthening its visibility and enhancing its competitiveness in target markets.

In the past three years, the company has made investments in the latest technologies in ceramic tile production. Therefore, the new catalogue of products from Gorenje Keramika offers a modern range of products intended for continuous improvement and satisfaction of the most demanding needs of the market and the customers.

Sustainable development
The company's commitment to protecting and preserving the environment is based on the belief that sustainable development is our common obligation.

The environmentally friendly tiles from Gorenje Keramika represent our commitment to the sustainable development of the environment, which is present in every product and all stages of production, including the distribution and life cycle of the product.

KAZALO PO FORMATIH
Index by formats

Notranje stenske ploščice
Indoor wall tiles

25 x 75 cm
9.8¨x 29,5¨

AGRA	12-13
VALLETTA	14-15
CATANIA	16-17
CANDY	18-21
NOSTALGIA	22-23
ESSENCE	24-25

20 x 50 cm
7.8¨x 19.6¨

ADORE	50-53
VENUS	54-55
SENSO	56-57
CHARM	58-59
AMOR	60-61
VELA	62-63
STRIPES	64-65

25 x 60 cm
9.8¨x 23.6¨

EAGLE	26-27
DALIA	28-29
DESIRE	30-31
MADISON	32-35
SURFACE	36-37
VISUAL	38-39
BLOSSOM	40-43
LUCY	44-45
DREAM	46-47
STREAMS	48-49

Glazirane porcelanske ploščice
Glazed porcelain tiles

15 x 60 cm
5,9¨x 23,6¨

NATUR	68-69
BARK	70
RIALTO	71
CRAFT	72-73
VINTAGE	74-75

30 x 60 cm
11,8¨x 23,6¨

FOREST	84-85
ARC	86
ALT	87
ASPEN	88-89
COUNTRY	90-91
ICELAND	92-97
FINESTONE	98-101
QUARZITE	102-103
MARMETTE	104-105
TERRAZZO	106-107
NAXOS	108-109
DESERT	110-111
LIPICA	112-113
VICENZA	114-115
BESTONE	116-117
CEMENT	118-119

22,5 x 90 cm
8,9¨x 35.4¨

COTTAGE	76-77
NORDIC	78-79
NATIVE	80-81
RUSTIC	82-83

Projektne ploščice
Project tiles

25 x 75 cm
9.8¨x 29,5¨

CANDY 75 WHITE	123
AGRA 75 WHITE	123
ESSENCE 75 WHITE	123

25 x 60 cm
9.8¨x 23.6¨

DREAM 65 WHITE	123
LUCY 65 WHITE	123
VISUAL 65 WHITE	123
SURFACE 65 WHITE	123
DESIRE 65 WHITE	123

Notranje talne ploščice
Indoor floor tiles

33,3˙x 33,3˙ cm
13.1¨ x 13.1¨

TALNE PLOŠČICE | Floor tiles 124-127

ABECEDNO KAZALO
Alphabetical Index

A
ADORE 3 BROWN 126
ADORE 3 GREY 126
ADORE 52 BEIGE 51
ADORE 52 BROWN 51
ADORE 52 GREY 53
ADORE 52 WHITE 53
ADORE BEIGE DC FLOWER A 51
ADORE BEIGE DC FLOWER B 51
ADORE BEIGE DC FLOWER C 51
ADORE BEIGE DC MOSAIC 51
ADORE BEIGE DC WAVES 51
ADORE BEIGE L LINES 51
ADORE BROWN L LINES 51
ADORE GREY L LINES 53
ADORE WHITE DC FLOWER A 53
ADORE WHITE DC FLOWER B 53
ADORE WHITE DC FLOWER C 53
ADORE WHITE DC MOSAIC 53
ADORE WHITE DC WAVES 53
ADORE WHITE L LINES 53
AGRA 75 BEIGE 13
AGRA 75 BROWN 13
AGRA 75 GREY 13
AGRA 75 WHITE 13, 123
AGRA BEIGE DC WAVES 3D 13
AGRA BEIGE DC WOOD 3D 13
AGRA WHITE DC WAVES 3D 13
AGRA WHITE DC WOOD 3D 13
ALT GREY 87
AMOR 3 BLUE 126
AMOR 52M 61
AMOR 52M3 61
AMOR M DC FLOWER 61
AMOR M DC LINES 61
AMOR M L LINES 61
AMOR M MOSAIC 1 61
ARC BROWN 86
ASPEN BROWN 89
ASPEN GREY 89

B
BARK BROWN 70
BESTONE BEIGE 117
BESTONE GREY 117
BLOSSOM 3 BLUE 127
BLOSSOM 3 BROWN 127
BLOSSOM 65 BEIGE 43
BLOSSOM 65 BLUE 77
BLOSSOM 65 BROWN 43
BLOSSOM B-B-W MOSAIC 1 43
BLOSSOM BEIGE DC FLOWER 43
BLOSSOM BEIGE DC PATCHWORK 43
BLOSSOM BEIGE DC WAVES 3D 43
BLOSSOM BEIGE L FLOWER 43
BLOSSOM W-B-W MOSAIC 1 41
BLOSSOM WHITE DC FLOWER 41
BLOSSOM WHITE DC PATCHWORK 41
BLOSSOM WHITE DC WAVES 3D . 41,45
BLOSSOM WHITE L FLOWER 41

C
CANDY 75 ALMOND 19
CANDY 75 BLUE 21
CANDY 75 CREAM 19
CANDY 75 GREY 21
CANDY 75 SAGE 19
CANDY 75 WHITE 21, 123
CANDY C-A MOSAIC 1 19
CANDY CREAM DC GEOMETRIC 19
CANDY CREAM DC WAVES 3D 19
CANDY W-G MOSAIC 1 21
CANDY WHITE DC GEOMETRIC 21
CANDY WHITE DC WAVES 3D 21
CATANIA 75 BEIGE 17
CATANIA 75 BROWN 17
CATANIA 75 GREY 17
CATANIA 75 WHITE 17
CATANIA BEIGE DC GEOMETRIC 17
CATANIA BEIGE DC MOSAIC 3D 17
CATANIA WHITE DC GEOMETRIC 17
CATANIA WHITE DC MOSAIC 3D 17
CEMENT GREY 119
CEMENT TAUPE 119
CHARM 3 BROWN 126
CHARM 3 GREY 126
CHARM 52 BEIGE 59
CHARM 52 BROWN 59
CHARM 52 GREY 59
CHARM 52 WHITE 59
CHARM BEIGE DC FLOWER 1 59
CHARM BEIGE DC FLOWER 2 59
CHARM BEIGE DC MOSAIC 59
CHARM BEIGE L LINES 59
CHARM WHITE DC FLOWER 1 59
CHARM WHITE DC FLOWER 2 59
CHARM WHITE DC MOSAIC 59
CHARM WHITE L LINES 59
COTTAGE ALMOND 77
COTTAGE BROWN 77
COTTAGE GOLD 77
COTTAGE GREY 77
COTTAGE NUT 77
COTTAGE WHITE 77
COUNTRY BEIGE 91
COUNTRY BROWN 91
CRAFT BEIGE 73
CRAFT BROWN 73
CRAFT GREY 73

D
DALIA BEIGE DC FLOWER 3D 29
DALIA BEIGE DC LINES 3D 29
DALIA BEIGE DC MOSAIC 3D 29
DALIA WHITE DC FLOWER 3D 29
DALIA WHITE DC LINES 3D 29
DALIA WHITE DC MOSAIC 3D 29
DESERT ASH 111
DESERT BEIGE 111
DESERT BROWN 111
DESERT GREY 111
DESIRE 65 BEIGE 31
DESIRE 65 GREY 31
DESIRE 65 WHITE 29, 123
DESIRE BEIGE DC LEVELS 3D 31
DESIRE GREY DC LEVELS 3D 31
DIVINE 52 BROWN 55
DIVINE BROWN L 55
DREAM 3 COFFEE 126
DREAM 65 COFFEE 47
DREAM 65 LIGHT COFFEE 47
DREAM 65 WHITE 47, 123
DREAM C-F MOSAIC 1 47
DREAM COFFEE DC FLOWER 47
DREAM COFFEE L FLOWER 47
DREAM LC-F MOSAIC 1 47
DREAM LIGHT COFFEE DC FLOWER 47
DREAM LIGHT COFFEE L FLOWER 47
DREAM W-F MOSAIC 1 47
DREAM WHITE DC FLOWER 47
DREAM WHITE L FLOWER 47

E
EAGLE 65 BEIGE 27
EAGLE 65 GREY 27
EAGLE BEIGE DC LINES 3D 27
EAGLE BEIGE DC MIX 3D 27
EAGLE BEIGE DC WOOD 3D 27, 31
EAGLE GREY DC LINES 3D 27
EAGLE GREY DC MIX 3D 27
EAGLE GREY DC WOOD 3D 27, 31
ESSENCE 75 WALNUT 25
ESSENCE 75 WHITE 25, 123
ESSENCE W MOSAIC 6 25
ESSENCE WALNUT DC LINES 3D 25

F
FINESTONE BE MOSAIC 4 99
FINESTONE BE MOSAIC 5 99
FINESTONE BEIGE 99
FINESTONE BR MOSAIC 4 99
FINESTONE BR MOSAIC 5 99
FINESTONE BROWN 99
FINESTONE LG MOSAIC 4 101
FINESTONE LG MOSAIC 5 101
FINESTONE LIGHT GREY 101
FINESTONE W MOSAIC 4 101
FINESTONE W MOSAIC 5 101
FINESTONE WHITE 101
FOREST BROWN 85
FOREST GREY 85
FOREST OAK 85
FOREST WHITE 85

I
ICELAND CR MOSAIC 4 95
ICELAND CR MOSAIC 5 95
ICELAND CR MOSAIC 7 95
ICELAND CREAM 95
ICELAND MI MOSAIC 4 94
ICELAND MI MOSAIC 5 94
ICELAND MI MOSAIC 7 94
ICELAND MIST 94
ICELAND SA MOSAIC 4 97
ICELAND SA MOSAIC 5 97
ICELAND SA MOSAIC 7 97
ICELAND SAND 97
ICELAND SI MOSAIC 4 93
ICELAND SI MOSAIC 5 93
ICELAND SI MOSAIC 7 93
ICELAND SILK 93

L
LIPICA SMOKE 113
LIPICA TAUPE 113
LUCY 3 BLACK 126
LUCY 3 GREY 126
LUCY 3 VIOLET 126
LUCY 65 BLACK 45
LUCY 65 GREY 45
LUCY 65 VIOLET 45
LUCY 65 WHITE 41, 45, 123
LUCY BLACK L MESH 45
LUCY GREY L MESH 45
LUCY VIOLET L MESH 45
LUCY W-B-M MOSAIC 1 45
LUCY W-G-M MOSAIC 1 45
LUCY W-V-M MOSAIC 1 45
LUCY WHITE DC FLOWER 45
LUCY WHITE DC MESH 45
LUCY WHITE L MESH 45

M
MADISON 3 GREY 126
MADISON 65 BEIGE 33
MADISON 65 BROWN 33
MADISON 65 GREY 35
MADISON 65 WHITE 35
MADISON BEIGE DC DETROIT 33
MADISON BEIGE DC MOSAIC 3D 33
MADISON BEIGE DC NEW YORK 33
MADISON BEIGE DC SEATTLE 33
MADISON BEIGE DC WAVES 3D 33
MADISON BEIGE L MOSAIC 33
MADISON BEIGE L WAVES 33
MADISON WHITE DC DETROIT 35
MADISON WHITE DC MOSAIC 3D 35
MADISON WHITE DC NEW YORK 35
MADISON WHITE DC SEATTLE 35
MADISON WHITE DC WAVES 3D 35
MADISON WHITE L MOSAIC 75
MADISON WHITE L WAVES 35
MARMETTE BEIGE 105
MARMETTE GREY 105

N
NATIVE ALMOND 81
NATIVE IVORY 81
NATIVE OAK 81
NATUR ALMOND 69
NATUR BROWN 69
NATUR GOLD 69
NATUR GREY 69
NATUR NUT 69
NATUR WHITE 69
NAXOS SMOKE 109
NAXOS GRAPHITE 109
NAXOS BONE 109
NAXOS HONEY 109
NORDIC PINE 79
NORDIC WALNUT 79
NORDIC WHITE 79
NOSTALGIA 75 WHITE 79
NOSTALGIA WHITE DC FLOWER 79

Q
QUARZITE P MOSAIC 4 103
QUARZITE P MOSAIC 5 103
QUARZITE PEARL 103
QUARZITE S MOSAIC 4 103
QUARZITE S MOSAIC 5 103
QUARZITE SAND 103

R
RIALTO GREY 71
RUSTIC BROWN 83
RUSTIC GREY 83
RUSTIC OAK 83
RUSTIC WHITE 83

S
SENSO 3 GREY 127
SENSO 52 GREY 57
SENSO 52 WHITE 57
SENSO WHITE DC ARABESQUE 57
SENSO WHITE DC GEOMETRIC 57
SENSO WHITE DC MOSAIC 57
SENSO WHITE L ARABESQUE 57
STREAMS 3 BROWN 127
STREAMS 3 GREY 127
STREAMS 3 WHITE 127
STREAMS 65 BROWN 49
STREAMS 65 GREY 49
STREAMS 65 WHITE 49
STREAMS W-B MOSAIC 1 49
STREAMS W-G MOSAIC 1 49
STREAMS WHITE DC LINES 49
STREAMS WHITE DC PATCHWORK 49
STREAMS WHITE L GEOMETRIC 49
STREAMS WHITE L PATCHWORK 49
STRIPES 3 BROWN 127
STRIPES 52 65
STRIPES 52B 65
STRIPES B MOSAIC 1 65
STRIPES DC FLOWER 65
STRIPES DC PATCHWORK 65
STRIPES L FLOWER 65
STRIPES MOSAIC 1 65
SURFACE 65 BEIGE 37
SURFACE 65 GREY 37
SURFACE 65 WHITE 37, 123
SURFACE BEIGE DC PATCHWORK 3D 37
SURFACE BEIGE DC WAVES 3D 37
SURFACE GREY DC PATCHWORK 3D 37
SURFACE GREY DC WAVES 3D 37
SURFACE WHITE DC WAVES 3D 37

T
TERRAZZO BEIGE 107
TERRAZZO GRAPHITE 107
TERRAZZO GREY 107

V
VALLETTA 75 BEIGE 15
VALLETTA 75 GREY 15
VALLETTA BEIGE DC HEXA 3D 15
VALLETTA BEIGE DC MOSAIC 3D 15
VALLETTA BEIGE DC WAVES 3D 15
VALLETTA GREY DC HEXA 3D 15
VALLETTA GREY DC MOSAIC 3D 15
VALLETTA GREY DC WAVES 3D 15
VELA 3 GREEN 127
VELA 52 GREEN 63
VELA 52 LIGHT GREEN 63
VELA LG-G MOSAIC 1 63
VELA LIGHT GREEN DC GRASS A 63
VELA LIGHT GREEN DC GRASS B 63
VELA LIGHT GREEN L GRASS 63
VENUS 3 BEIGE 127
VENUS 52 BEIGE 55
VENUS B-B-M MOSAIC 1 55
VENUS BEIGE DC FLOWER A 55
VENUS BEIGE DC FLOWER B 55
VENUS BEIGE DC GEOMETRIC 55
VENUS BEIGE DC MOSAIC 3D 55
VICENZA BEIGE 115
VICENZA GREY 115
VINTAGE BROWN 75
VINTAGE GREY 75
VINTAGE OAK 75
VINTAGE WHITE 75
VISUAL 65 GREY 39
VISUAL 65 TAUPE 39
VISUAL 65 WHITE 39, 123
VISUAL GREY DC BRICK 3D 39
VISUAL GREY DC LINES 3D 39
VISUAL TAUPE DC BRICK 3D 39
VISUAL TAUPE DC LINES 3D 39
VISUAL WHITE DC PATCHWORK 39

SIMBOLI
Symbols

Simboli spodaj označujejo tehnične značilnosti in priporočene pogoje uporabe.
Symbols below indicate the technical features and the recommended use conditions.

Stenska ploščica / Wall tile

Talna ploščica / Floor tile

Sredinski dekor / Central decor (m^2)

Sredinski dekor / Central decor (kos/pcs)

3D struktura / 3D structure

Listelo / Listello

Mozaik 1 / Mosaic 1

Mozaik 4/ Mosaic 4

Mozaik 5/ Mosaic 5

Mozaik 6/ Mosaic 6

Mozaik 7/ Mosaic 7

Možnost razreza /Cutting option

Število različnih lic/Number of different faces

Odpornost proti zmrzovanju/Frost resistance

Primerno za zunanje površine/
Suitable for outdoor areas

Primerno za bivalne površine/
Suitable for residential areas

Razred drsnosti/Slipperiness

Razred drsnoti na mokri podlagi/
Slipperiness on wet surfaces

Odpornost proti obrabi /Abrasion resistance

Razred drsnosti / Slipperiness

Mat ploščica / Matt tile

Sijajna ploščica / Glossy tile

V1 Ploščice z enakomernim izgledom/Tiles with uniformed appearance

V2 Ploščice z rahlo različnim odtenkom in izgledom/Tiles with slight shade and aspect variation

V3 Ploščice z zmerno različnim odtenkom in/ali izgledom/Tiles with moderate shade and/or aspect variation

V4 Ploščice z večjo razliko v odtenku in izgledu/Tiles with stronger shade and aspect variation

Paket / Box

Paleta / Pallet

Dolžina in širina / Length and width

Debelina / Thickness

Ravnost robov / Straightness of sides

Pravokotnost / Rectangularity

Ravnost površine / Surface flatness

Vpijanje vode / Water absorption

Upogibna trdnost / Modulus of rupture

Zlomna sila / Breaking strength

Odpornost proti lasastim razpokam /
Crazing resistance

Odpornost proti madežem /
Resistance to staining

Odpornost proti nizkim koncentracijam kislin in alkalij / Resistance to low acid and alkaline concentrations

Odpornost proti hitrim temperaturnim razlikam/
Thermal shock resistance

RAZLAGA STRANI
How to use this book

NOVA SERIJA
New Series

IME SERIJE
Series Name

SKUPINA IZDELKA
Product Typology

NEW **VALLETTA**

Notranje stenske ploščice | Indoor wall tiles

AMBIENT
Ambiance

Valleta 75 Beige, Valletta Beige DC Waves 3D, Nordic Pine, Terrazzo Beige

ŠTEVILKA STRANI
Page Number

4

PLOŠČICE V AMBIENTU
Tiles in Ambiance

DIMENZIJA
Dimension

VRSTA POVRŠINE
Surface Type

SIMBOLI
Symbols

VALLETTA

Notranje stenske ploščice | Indoor wall tiles
Gladka ali reliefna površina | Smooth or structured surface
25x75 cm | 9.8"x 29.5"

BARVE | COLORS

VALLETTA 75 BEIGE

VALLETTA 75 GREY

IME PLOŠČICE
Tile Name

VALLETTA BEIGE DC WAVES 3D

VALLETTA GREY DC WAVES 3D

3D
STRUKTURA
3D Structure

VALLETTA BEIGE DC MOSAIC 3D

VALLETTA GREY DC MOSAIC 3D

VALLETTA BEIGE DC HEXA 3D

VALLETTA GREY DC HEXA 3D

TALNE PLOŠČICE
Floor Tiles

Priporočene talne ploščice | Recommended floor tiles

BESTONE BEIGE
stran | page: 43

NORDIC PINE
stran | page: 23

BESTONE GREY
stran | page: 43

NORDIC WHITE
stran | page: 23

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	22,30	42	63,00	980
3D	25x75	7	1,31	23,20	28	36,68	650

LOGISTIČNI PODATKI
Logistic Data

NOTRANJE STENSKE PLOŠČICE

Indoor wall tiles

DIMENZIJE | Dimensions

25 x 75 cm | 9.8¨x 29.5¨
25 x 60 cm | 9.8¨x 23.6¨
20 x 50 cm | 7.8¨x 19.6¨

Notranje stenske ploščice | Indoor wall tiles

Reliefna ali gladka površina
Structured or smooth surface

Različna grafična lica | Different faces

Mat ali sijajno
Matt or glossy

Skladno z zahtevami standarda SIST EN 14411, aneks L skupina BIII
Classification in accordance with SIST EN 14411 Annex L Group BIII

KAZALO PO TIPU IZDELKA IN FORMATU

Products index by typology and formats

Enobarvno Monocolor

CANDY 18-21
SURFACE 36-37
BLOSSOM 40-43
LUCY 44-45
DREAM 46-47
ADORE 50-53
AMOR 60-61
VELA 62-63

Les Wood

NOSTALGIA 22-23
ESSENCE 24-25
DALIA 28-29
DESIRE 30-31

Kamen Stone

VALLETTA 14-15
EAGLE 26-27
MADISON 32-35
STREAMS 48-49
VENUS 54-55
STRIPES 64-65

Cement Concrete

AGRA 12-13
CATANIA 16-17
VISUAL 38-39
SENSO 56-57
CHARM 58-59

3D stena 3D wall

AGRA 12-13
VALLETTA 58-59
CATANIA 16-17
CANDY 18-21
ESSENCE 24-25
EAGLE 26-27
DALIA 28-29
DESIRE 30-31
SURFACE 36-37
VISUAL 38-39

25 x 75 cm 9.8" x 29.5"

AGRA 12-13
VALLETTA 14-15
CATANIA 16-17
CANDY 18-21
NOSTALGIA 22-23
ESSENCE 24-25

25 x 60 cm 9.8" x 23.6"

EAGLE 26-27
DALIA 28-29
DESIRE 30-31
MADISON 32-35
SURFACE 36-37
VISUAL 38-39
BLOSSOM 40-43
LUCY 44-45
DREAM 46-47
STREAMS 48-49

20 x 50 cm 7.8" x 19.6"

ADORE 50-53
VENUS 54-55
SENSO 56-57
CHARM 58-59
AMOR 60-61
VELA 62-63
STRIPES 64-65

AGRA

Notranje stenske ploščice | Indoor wall tiles

Agra 75 White, Agra White DC Wood 3D, Bestone Grey

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	23,30	42	63,00	980
3D	25x75	7	1,31	23,20	28	36,68	650

AGRA

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x75 cm | 9.8¨x 29.5¨

M

BARVE | COLORS

AGRA 75 BEIGE

AGRA 75 WHITE

AGRA 75 BROWN

AGRA 75 GREY

AGRA BEIGE DC WAVES 3D

AGRA WHITE DC WAVES 3D

AGRA BEIGE DC WOOD 3D

AGRA WHITE DC WOOD 3D

Priporočene talne ploščice | Recommended floor tiles

TERRAZZO BEIGE
stran | page: 107

NORDIC PINE
stran | page: 79

BESTONE GREY
stran | page: 117

NORDIC WHITE
stran | page: 79

VALLETTA

Notranje stenske ploščice | Indoor wall tiles

Valleta 75 Beige, Valletta Beige DC Waves 3D, Nordic Pine, Terrazzo Beige

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
✋	25x75	8	1,50	23,30	42	63,00	980
3D	25x75	7	1,31	23,20	28	36,68	650

VALLETTA

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x75 cm | 9.8¨x 29.5¨

M

BARVE | COLORS

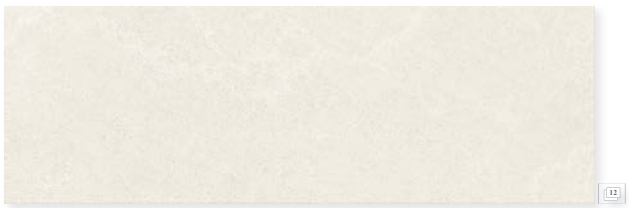

VALLETTA 75 BEIGE

VALLETTA 75 GREY

VALLETTA BEIGE DC WAVES 3D

VALLETTA GREY DC WAVES 3D

VALLETTA BEIGE DC MOSAIC 3D

VALLETTA GREY DC MOSAIC 3D

VALLETTA BEIGE DC HEXA 3D

VALLETTA GREY DC HEXA 3D

Priporočene talne ploščice | Recommended floor tiles

ICELAND SAND
stran | page: 97

NORDIC PINE
stran | page: 79

BESTONE GREY
stran | page: 117

NORDIC WHITE
stran | page: 79

CATANIA

Notranje stenske ploščice | Indoor wall tiles

Catania 75 White, Catania 75 Grey, Catania White DC Geometric, Nordic White

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	23,30	42	63,00	980
DC	25x75	8	1,50	23,20	28	42,00	650
3D	25x75	7	1,31	23,20	28	36,68	650

CATANIA

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x75 cm | 9.8¨x 29.5¨

M

BARVE | COLORS

CATANIA 75 BEIGE

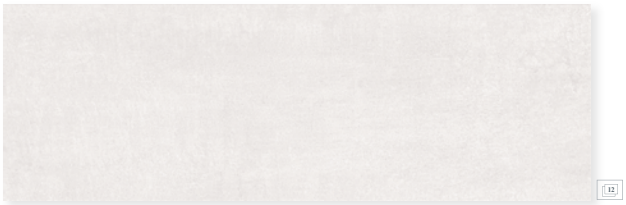

CATANIA 75 WHITE

CATANIA 75 BROWN

CATANIA 75 GREY

CATANIA BEIGE DC GEOMETRIC

CATANIA WHITE DC GEOMETRIC

CATANIA BEIGE DC MOSAIC 3D

CATANIA WHITE DC MOSAIC 3D

Priporočene talne ploščice | Recommended floor tiles

NORDIC PINE
stran | page: 79

TERRAZZO BEIGE
stran | page: 107

NORDIC WHITE
stran | page: 79

CEMENT TAUPE
stran | page: 119

CANDY

Notranje stenske ploščice | Indoor wall tiles

Candy 75 Cream, Candy Cream DC Geometric, Candy 75 Sage, Craft Beige

CANDY

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x75 cm | 9.8¨x 29.5¨
30 x 30 cm | 11,8¨x 11,8¨

BARVE | COLORS

CANDY 75 CREAM

CANDY CREAM DC WAVES 3D

CANDY 75 ALMOND

CANDY CREAM DC GEOMETRIC

CANDY 75 SAGE



CANDY C-A MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

CRAFT BEIGE
stran | page: 73

BESTONE BEIGE
stran | page: 117

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	23,30	42	63,00	980
DC	25x75	8	1,50	23,20	28	42,00	650
3D	25x75	7	1,31	23,20	28	36,68	650
	30x30	11	0,98	14,50			

CANDY

Notranje stenske ploščice | Indoor wall tiles

Candy 75 White, Candy White DC Geometric, Candy 75 Blue, Cement Grey

CANDY

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x75 cm | 9.8¨x 29.5¨
30 x 30 cm | 11,8¨x 11,8¨

BARVE | COLORS

CANDY 75 WHITE

CANDY WHITE DC WAVES 3D

CANDY 75 GREY

CANDY WHITE DC GEOMETRIC

CANDY 75 BLUE


CANDY W-G MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles


TERRAZZO GREY
stran | page: 107

CEMENT GREY
stran | page: 119

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	23,30	42	63,00	980
DC	25x75	8	1,50	23,20	28	42,00	650
3D	25x75	7	1,31	23,20	28	36,68	650
	30x30	11	0,98	14,50			

NEW

NOSTALGIA

Notranje stenske ploščice | Indoor wall tiles

Nostalgia 75 White, Nostalgia White DC Flower, Vintage Oak

NOSTALGIA

Notranje stenske ploščice | Indoor wall tiles

Gladka površina | Smooth surface
25x75 cm | 9.8¨x 29.5¨

M

BARVE | COLORS

NOSTALGIA 75 WHITE

NOSTALGIA WHITE DC FLOWER

Priporočene talne ploščice | Recommended floor tiles

VINTAGE OAK 15x60 cm
stran | page: 75

VINTAGE BROWN 15x60 cm
stran | page: 75

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	23,30	42	63,00	980
DC	25x75	8	1,50	23,20	28	42,00	650
	15x60	10	0,90	17,70	64	57,60	1.130

NEW

ESSENCE

Notranje stenske ploščice | Indoor wall tiles

Essence 75 White, Essence Walnut DC Lines 3D, Nordic Walnut

ESSENCE

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x75 cm | 9.8¨x 29.5¨

M

BARVE | COLORS

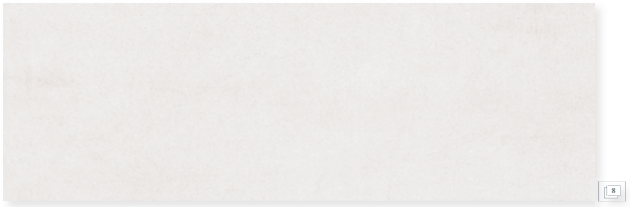

ESSENCE 75 WHITE

ESSENCE WALNUT DC LINES 3D

ESSENCE 75 WALNUT

ESSENCE W MOSAIC 6 20x60 cm

Priporočene talne ploščice | Recommended floor tiles

NORDIC WALNUT
stran | page: 79

CEMENT GREY
stran | page: 119

ICELAND SILK
stran | page: 93

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	23,30	42	63,00	980
3D	25x75	7	1,31	23,20	28	36,68	650
	20x60	10	0,97	14,60			

EAGLE

Notranje stenske ploščice | Indoor wall tiles

Eagle 65 Grey, Eagle Grey DC Wood 3D, Aspen Grey

EAGLE

Notranje stenske ploščice | Indoor wall tiles

Reliefna površina | Structured surface

25x60 cm | 9.8¨x 23,6¨

BARVE | COLORS

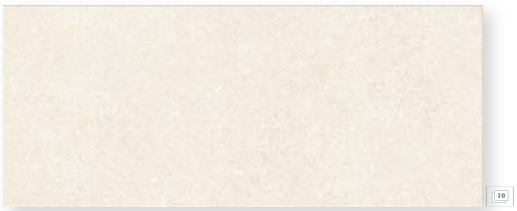

EAGLE 65 BEIGE

EAGLE 65 GREY

EAGLE BEIGE DC LINES 3D

EAGLE GREY DC LINES 3D

EAGLE BEIGE DC MIX 3D

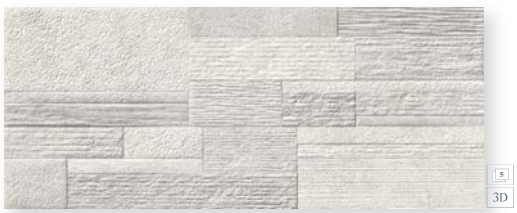

EAGLE GREY DC MIX 3D

EAGLE BEIGE DC WOOD 3D

EAGLE GREY DC WOOD 3D

Priporočene talne ploščice | Recommended floor tiles

VICENZA BEIGE
stran | page: 115

TERRAZZO BEIGE
stran | page: 107

VICENZA GREY
stran | page: 115

ASPEN GREY
stran | page: 89

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
3D	25x60	8	1,20	19,90	32	38,40	640

NEW

DALIA

Notranje stenske ploščice | Indoor wall tiles

Desire 65 Beige, Dalia Beige DC Lines 3D, Iceland Cream

DALIA

Notranje stenske ploščice | Indoor wall tiles

Reliefna površina | Structured surface

25x60 cm | 9.8¨x 23,6¨

M

BARVE | COLORS

DESIRE 65 BEIGE

DESIRE 65 WHITE

DALIA BEIGE DC FLOWER 3D

DALIA WHITE DC FLOWER 3D

DALIA BEIGE DC LINES 3D

DALIA WHITE DC LINES 3D

DALIA BEIGE DC MOSAIC 3D

DALIA WHITE DC MOSAIC 3D

Priporočene talne ploščice | Recommended floor tiles

ASPEN BROWN
stran | page: 89

ICELAND CREAM
stran | page: 95

ASPEN GREY
stran | page: 89

ICELAND MIST
stran | page: 94

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
3D	25x60	8	1,20	19,90	32	38,40	640

DESIRE

Notranje stenske ploščice | Indoor wall tiles

Desire 65 Beige, Desire Beige DC Levels 3D, Craft Brown

DESIRE

Notranje stenske ploščice | Indoor wall tiles

Reliefna površina | Structured surface

25x60 cm | 9.8¨x 23,6¨

BARVE | COLORS

DESIRE 65 BEIGE

DESIRE 65 GREY

DESIRE BEIGE DC LEVELS 3D

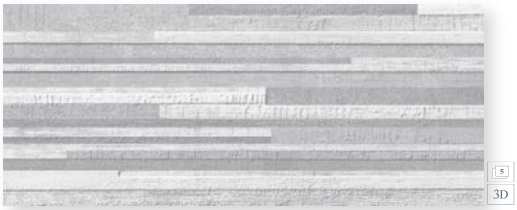

DESIRE GREY DC LEVELS 3D

EAGLE BEIGE DC WOOD 3D

EAGLE GREY DC WOOD 3D

Priporočene talne ploščice | Recommended floor tiles

VICENZA BEIGE
stran | page: 115

CRAFT BROWN
stran | page: 73

VICENZA GREY
stran | page: 115

RIALTO GREY
stran | page: 71

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
3D	25x60	8	1,20	19,90	32	38,40	640

MADISON

Notranje stenske ploščice | Indoor wall tiles

Madison 65 Beige, Madison 65 Brown, Cement Taupe

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
3D	25x60	8	1,20	19,90	32	38,40	640
DC	25x60	9	1,35	20,80			
	cm	kos / pcs	m	kg			
L	5x60	12	7,20	6,00			
L	6x60	12	7,20	7,50			

MADISON

Notranje stenske ploščice | Indoor wall tiles

Reliefna površina | Structured surface
25x60 cm | 9.8¨x 23,6¨
5x60 cm | 1.9¨x 23,6¨
6x60 cm | 2.3¨x 23,6¨

BARVE | COLORS

MADISON 65 BEIGE

MADISON BEIGE DC DETROIT

MADISON 65 BROWN

MADISON BEIGE DC NEW YORK

MADISON BEIGE DC WAVES 3D

MADISON BEIGE DC SEATTLE

MADISON BEIGE DC MOSAIC 3D

MADISON BEIGE L WAVES 5x60 cm

MADISON BEIGE L MOSAIC 6x60 cm

Priporočene talne ploščice | Recommended floor tiles

CEMENT TAUPE
stran | page: 119

ICELAND SAND
stran | page: 97

NAXOS BONE
stran | page: 109

MADISON

Notranje stenske ploščice | Indoor wall tiles

Madison 65 White, Madison White DC Seattle, Madison White DC Detroit, Madison White DC New York, Madison White DC Waves 3D, Natur Grey

OPIS DESCRIPTION							
	cm	**kos / pcs**	**m² / Mq**	**kg**	**paketov / boxes**	**m² / Mq**	**kg**
	25x60	9	1,35	20,60	64	86,40	1.320
3D	25x60	8	1,20	19,90	32	38,40	640
DC	25x60	9	1,35	20,80			
	cm	**kos / pcs**	**m**	**kg**			
L	5x60	12	7,20	6,00			
L	6x60	12	7,20	7,50			

MADISON

Notranje stenske ploščice | Indoor wall tiles

Reliefna površina | Structured surface
25x60 cm | 9.8¨x 23,6¨
5x60 cm | 1.9¨x 23,6¨
6x60 cm | 2.3¨x 23,6¨

BARVE | COLORS

MADISON 65 WHITE

MADISON WHITE DC DETROIT

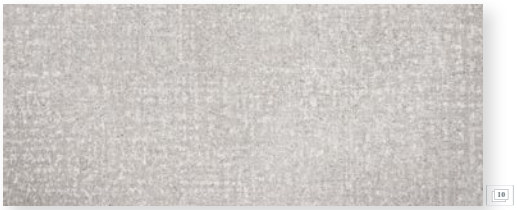
MADISON 65 GREY

MADISON WHITE DC NEW YORK

MADISON WHITE DC WAVES 3D

MADISON WHITE DC SEATTLE

MADISON WHITE DC MOSAIC 3D

MADISON WHITE L WAVES 5x60 cm

MADISON WHITE L MOSAIC 6x60 cm

Priporočene talne ploščice | Recommended floor tiles

MADISON 3 GREY
stran | page: 126

ICELAND SILK
stran | page: 93

NATUR GREY
stran | page: 69

SURFACE

Notranje stenske ploščice | Indoor wall tiles

Surface 65 White, Surface Beige DC Patchwork 3D, Iceland Silk

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
3D	25x60	8	1,20	19,90	32	38,40	640

SURFACE

Notranje stenske ploščice | Indoor wall tiles

Reliefna površina | Structured surface
25x60 cm | 9.8¨x 23,6¨

M

BARVE | COLORS

SURFACE 65 WHITE

SURFACE WHITE DC WAVES 3D

SURFACE 65 BEIGE

SURFACE 65 GREY

SURFACE BEIGE DC WAVES 3D

SURFACE GREY DC WAVES 3D

SURFACE BEIGE DC PATCHWORK 3D

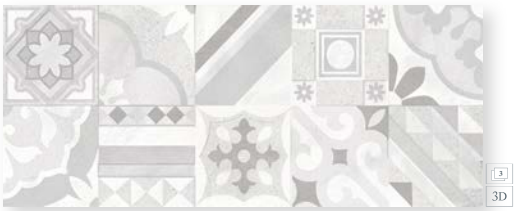

SURFACE GREY DC PATCHWORK 3D

Priporočene talne ploščice | Recommended floor tiles

BARK BROWN
stran | page: 70

CRAFT BEIGE
stran | page: 73

ICELAND SILK
stran | page: 93

CEMENT GREY
stran | page: 119

NEW

VISUAL

Notranje stenske ploščice | Indoor wall tiles

Visual Taupe DC Brick 3D, Visual 65 White, Visual 65 Taupe, Cement Taupe

VISUAL

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x60 cm | 9.8¨x 23,6¨

M

BARVE | COLORS

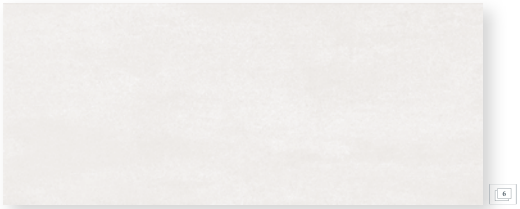
VISUAL 65 WHITE

VISUAL WHITE DC PATCHWORK

VISUAL 65 TAUPE

VISUAL 65 GREY

VISUAL TAUPE DC BRICK 3D

VISUAL GREY DC BRICK 3D

VISUAL TAUPE DC LINES 3D

VISUAL GREY DC LINES 3D

Priporočene talne ploščice | Recommended floor tiles

CEMENT TAUPE
stran | page: 119

NORDIC WHITE
stran | page: 79

CEMENT GREY
stran | page: 119

ICELAND SILK
stran | page: 93

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
DC	25x60	9	1,35	20,00	32	43,20	640
3D	25x60	8	1,20	19,90	32	38,40	640

BLOSSOM

Notranje stenske ploščice | Indoor wall tiles

Blossom White DC Flower, Lucy 65 White, Blossom 65 Blue, Lucy 3 Grey

BLOSSOM

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x60 cm | 9.8¨x 23,6¨
30x30 cm | 11,8¨x 11,8¨
5x60 cm | 1.9¨x 23,6¨

BARVE | COLORS

LUCY 65 WHITE

BLOSSOM WHITE DC PATCHWORK

BLOSSOM 65 BLUE

BLOSSOM WHITE DC FLOWER

BLOSSOM WHITE DC WAVES 3D

BLOSSOM WHITE L FLOWER 5x60 cm



BLOSSOM W-B-W MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

BLOSSOM BLUE
stran | page: 126

LUCY 3 GREY
stran | page: 126



TERRAZZO GREY
stran | page: 107

CEMENT GREY
stran | page: 119

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
DC	25x60	9	1,35	20,00	32	43,20	640
3D	25x60	8	1,20	19,90	32	38,40	640
	30x30	11	0,98	14,50			
	cm	kos / pcs	m	kg			
L	5x60	12	7,20	6,00			

BLOSSOM

Notranje stenske ploščice | Indoor wall tiles

Blossom Beige DC Patchwork, Blossom 65 Beige, Blossom B-B-W Mosaic 1, Blossom Beige DC Waves 3D, Blossom 3 Brown

BLOSSOM

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x60 cm | 9.8¨x 23,6¨
30x30 cm | 11,8¨x 11,8¨
5x60 cm | 1.9¨x 23,6¨

BARVE | COLORS

BLOSSOM 65 BEIGE

BLOSSOM BEIGE DC PATCHWORK

BLOSSOM 65 BROWN

BLOSSOM BEIGE DC FLOWER

BLOSSOM BEIGE L FLOWER 5x60 cm

BLOSSOM BEIGE DC WAVES 3D

BLOSSOM B-B-W MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

BLOSSOM 3 BROWN
stran | page: 126

CRAFT BEIGE
stran | page: 73

MARMETTE BEIGE
stran | page: 105

CEMENT TAUPE
stran | page: 119

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
DC	25x60	9	1,35	20,00	32	43,20	640
3D	25x60	8	1,20	19,90	32	38,40	640
	30x30	11	0,98	14,50			
	cm	kos / pcs	m	kg			
L	5x60	12	7,20	6,00			

LUCY

Notranje stenske ploščice | Indoor wall tiles

Lucy White DC Flower, Lucy 65 White, Lucy 65 Violet, Lucy W-V-M Mosaic 1, Lucy 3 Violet

OPIS DESCRIPTION							
	cm	**kos / pcs**	**m² / Mq**	**kg**	**paketov / boxes**	**m² / Mq**	**kg**
	25x60	9	1,35	20,60	64	86,40	1.320
DC	25x60	9	1,35	20,00	32	43,20	640
3D	25x60	8	1,20	19,90	32	38,40	640
	30x30	11	0,98	14,50			
	cm	**kos / pcs**	**m**	**kg**			
L	5x60	12	7,20	6,00			

LUCY

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
25x60 cm | 9.8¨x 23,6¨
30x30 cm | 11,8¨x 11,8¨
4,5x60 cm | 1.7¨x 23,6¨

BARVE | COLORS

LUCY 65 WHITE

LUCY 65 GREY

LUCY 65 VIOLET

LUCY 65 BLACK

DC
LUCY WHITE DC FLOWER

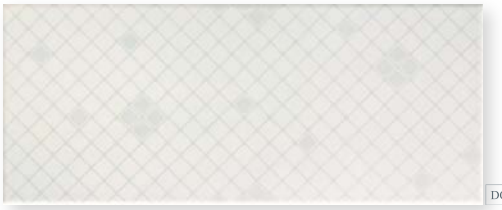
DC
LUCY WHITE DC MESH

3D
BLOSSOM WHITE DC WAVES 3D

L
LUCY WHITE L MESH 4,5x60 cm

L
LUCY GREY L MESH 4,5x60 cm

L
LUCY VIOLET L MESH 4,5x60 cm

L
LUCY BLACK L MESH 4,5x60 cm


LUCY W-G-M MOSAIC 1
30x30 cm

LUCY W-V-M MOSAIC 1
30x30 cm

LUCY W-B-M MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

LUCY 3 VIOLET
stran | page:126

LUCY 3 GREY
stran | page: 126

LUCY 3 BLACK
stran | page: 126

FINESTONE WHITE
stran | page: 101

DREAM

Notranje stenske ploščice | Indoor wall tiles

Dream Light Coffee DC Flower, Dream 65 Light Coffee

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
DC	25x60	9	1,35	20,00	32	43,20	640
	cm	kos / pcs	m	kg			
L	5x60	12	7,20	6,00			
	30x30	11	3,30	15,00			

DREAM

Notranje stenske ploščice | Indoor wall tiles

Gladka površina | Smooth surface
25x60 cm | 9.8¨x 23,6¨
30x30 cm | 11,8¨x 11,8¨
5x60 cm | 1.9¨x 23,6¨

BARVE | COLORS

DREAM 65 WHITE

DREAM WHITE DC FLOWER

DREAM 65 LIGHT COFFEE

DREAM LIGHT COFFEE DC FLOWER

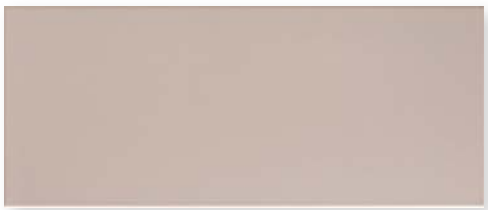
DREAM 65 COFFEE

DREAM COFFEE DC FLOWER

DREAM WHITE L FLOWER 5x60 cm

DREAM LIGHT COFFEE L FLOWER 5x60 cm

DREAM COFFEE L FLOWER 5x60 cm

DREAM W-F MOSAIC 1
30x30 cm


DREAM LC-F MOSAIC 1
30x30 cm

DREAM C-F MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

DREAM 3 COFFEE
stran | page:126

FINESTONE WHITE
stran | page: 101

CEMENT TAUPE
stran | page: 119

TERRAZZO BEIGE
stran | page: 107

STREAMS

Notranje stenske ploščice | Indoor wall tiles

Streams White DC Lines, Streams 65 Brown, Streams 65 White, Craft Brown

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x60	9	1,35	20,60	64	86,40	1.320
DC	25x60	9	1,35	20,00	32	43,20	640
	30x30	11	0,98	14,50			
	cm	kos / pcs	m	kg			
L	5x60	12	7,20	6,00			

STREAMS

Notranje stenske ploščice | Indoor wall tiles

Gladka površina | Smooth surface
25x60 cm | 9.8¨x 23,6¨
30x30 cm | 11,8¨x 11,8¨
5x60 cm | 1.9¨x 23,6¨

BARVE | COLORS

STREAMS 65 WHITE

STREAMS 65 BROWN

STREAMS 65 GREY

STREAMS WHITE DC PATCHWORK

STREAMS WHITE DC LINES

STREAMS WHITE L GEOMETRIC 5x60 cm

STREAMS WHITE L PATCHWORK 5x60 cm



STREAMS W-B MOSAIC 1
30x30 cm

STREAMS W-G MOSAIC 1
30x30

Priporočene talne ploščice | Recommended floor tiles

STREAMS 3 BROWN
stran | page: 127

STREAMS 3 WHITE
stran | page:127

STREAMS 3 GREY
stran | page:127

FINESTONE WHITE
stran | page: 101

ADORE

Notranje stenske ploščice | Indoor wall tiles

Adore 52 Brown, Adore 52 Beige, Adore Beige DC Waves, Adore 3 Brown

ADORE

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
20x50 cm | 7.8¨x 19.6¨
5x50 cm | 1.9¨x 19.6¨

BARVE | COLORS

ADORE 52 BEIGE

ADORE BEIGE DC FLOWER C

ADORE 52 BROWN

ADORE BEIGE DC FLOWER B

ADORE BEIGE DC MOSAIC

ADORE BEIGE DC FLOWER A

ADORE BEIGE DC WAVES

ADORE BEIGE L LINES 5x50 cm

ADORE BROWN L LINES 5x50 cm

Priporočene talne ploščice | Recommended floor tiles

ADORE 3 BROWN
stran | page: 126

ASPEN BROWN
stran | page: 89

COTTAGE WHITE
stran | page: 77

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	15	1,50	22,30			
	cm	kos / pcs	m	kg			
L	5x50	12	6,00	5,00			

ADORE

Notranje stenske ploščice | Indoor wall tiles

Adore 52 White, Adore White DC Flower A, Adore White DC Flower B, Adore White DC Flower C

ADORE

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
20x50 cm | 7.8¨x 19.6¨
5x50 cm | 1.9¨x 19.6¨

BARVE | COLORS

ADORE 52 WHITE

ADORE WHITE DC FLOWER C

ADORE 52 GREY

ADORE WHITE DC FLOWER B

ADORE WHITE DC MOSAIC

ADORE WHITE DC FLOWER A

ADORE WHITE DC WAVES

ADORE WHITE L LINES 5x50 cm

ADORE GREY L LINES 5x50 cm

Priporočene talne ploščice | Recommended floor tiles

ADORE 3 GREY
stran | page: 126

ASPEN GREY
stran | page: 89

COTTAGE GREY
stran | page: 77

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	15	1,50	22,30			
	cm	kos / pcs	m	kg			
L	5x50	12	6,00	5,00			

VENUS

Notranje stenske ploščice | Indoor wall tiles

Venus 52 Beige, Venus Beige DC Geometric, Divine 52 Brown, Venus Beige DC Mosaic, Venus 3 Beige

VENUS

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
20x50 cm | 7.8¨x 19.6¨
30x30 cm | 11,8¨x 11,8¨
5x50 cm | 1.9¨x 19.6¨

BARVE | COLORS

VENUS 52 BEIGE

VENUS BEIGE DC FLOWER B

DIVINE 52 BROWN

VENUS BEIGE DC FLOWER A

VENUS BEIGE DC MOSAIC

VENUS BEIGE DC GEOMETRIC

DIVINE BROWN L 5x50 cm


VENUS B-B-M MOSAIC 1
30 x 30 cm

Priporočene talne ploščice | Recommended floor tiles

VENUS 3 BEIGE
stran | page: 127

ICELAND CREAM
stran | page: 95

RUSTIC WHITE
stran | page: 83

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	18	1,80	26,80	22	39,60	590
DC	20x50	15	1,50	22,30			
	30x30	11	0,98	14,50			
	cm	kos / pcs	m	kg			
L	5x50	12	6,00	5,00			

SENSO

Notranje stenske ploščice | Indoor wall tiles

Senso 52 White, Senso White DC Mosaic

SENSO

Notranje stenske ploščice | Indoor wall tiles

Gladka ali reliefna površina | Smooth or structured surface
20x50 cm | 7.8¨x 19.6¨
5x50 cm | 1.9¨x 19.6¨

BARVE | COLORS

SENSO 52 WHITE

SENSO WHITE DC GEOMETRIC

SENSO 52 GREY

SENSO WHITE DC MOSAIC

SENSO WHITE DC ARABESQUE

SENSO WHITE L ARABESQUE 5x50 cm

Priporočene talne ploščice | Recommended floor tiles

SENSO 3 GREY
stran | page:127

NAXOS GRAPHITE
stran | page: 109

FOREST WHITE
stran | page: 85

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	18	1,80	26,80	22	39,60	590
DC	20x50	15	1,50	22,30			
	cm	kos / pcs	m	kg			
L	5x50	12	6,00	5,00			

CHARM

Notranje stenske ploščice | Indoor wall tiles

Charm 52 Grey, Charm 52 White, Charm White DC Flower 1, Charm White DC Flower 2, Charm 3 Grey

OPIS DESCRIPTION							
	cm	**kos / pcs**	**m² / Mq**	**kg**	**paketov / boxes**	**m² / Mq**	**kg**
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	15	1,50	22,30			
	cm	**kos / pcs**	**m**	**kg**			
L	5x50	12	6,00	5,00			

CHARM

Notranje stenske ploščice | Indoor wall tiles

Gladka površina | Smooth surface
20x50 cm | 7.8¨x 19.6¨
5x50 cm | 1.9¨x 19.6¨

BARVE | COLORS

CHARM 52 BEIGE

CHARM 52 WHITE

CHARM 52 BROWN

CHARM 52 GREY

CHARM BEIGE DC MOSAIC

CHARM WHITE DC MOSAIC

CHARM BEIGE DC FLOWER 1

CHARM WHITE DC FLOWER 1

CHARM BEIGE DC FLOWER 2

CHARM WHITE DC FLOWER 2

CHARM BEIGE L LINES 5x50 cm


CHARM WHITE L LINES 5x50 cm

Priporočene talne ploščice | Recommended floor tiles

CHARM 3 BROWN
stran | page:126

NORDIC PINE
stran | page: 79

CHARM 3 GREY
stran | page:126

NORDIC WHITE
stran | page: 79

AMOR

Notranje stenske ploščice | Indoor wall tiles

Amor M DC Lines, Amor 52M, Amor 52M3, Amor M L Lines, Amor 3 Blue

AMOR

Notranje stenske ploščice | Indoor wall tiles

Gladka površina | Smooth surface
20x50 cm | 7.8¨x 19.6¨
30x30 cm | 11,8¨x 11,8¨
5x50 cm | 1.9¨x 19.6¨

BARVE | COLORS

AMOR 52M

AMOR M DC LINES

AMOR 52M3

AMOR M L LINES 5x50 cm

AMOR M DC FLOWER

AMOR M MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

AMOR 3 BLUE
stran | page: 126

CEMENT GREY
stran | page: 119

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	15	1,50	22,30			
	30x30	11	0,98	14,5			
	cm	kos / pcs	m	kg			
L	5x50	12	6,00	5,00			

VELA

Notranje stenske ploščice | Indoor wall tiles

Vela 52 Light Green, Vela 52 Green, Vela Light Green L Grass, Vela 3 Green

VELA

Notranje stenske ploščice | Indoor wall tiles

Gladka površina | Smooth surface
20x50 cm | 7.8¨x 19.6¨
30x30 cm | 11,8¨x 11,8¨
8x50 cm | 3.1¨x 19.6¨

BARVE | COLORS

VELA 52 LIGHT GREEN

VELA 52 GREEN

VELA LIGHT GREEN DC GRASS B

VELA LIGHT GREEN DC GRASS A

VELA LIGHT GREEN L GRASS 8x50 cm

VELA LG-G MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

VELA 3 GREEN
stran | page: 127

MARMETTE GREY
stran | page: 105

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	15	1,50	22,30			
	30x30	11	0, 98	14,50			
	cm	kos / pcs	m	kg			
L	8x50	12	6,00	8,20			

STRIPES

Notranje stenske ploščice | Indoor wall tiles

Stripes 52, Stripes B Mosaic 1, Stripes 52B, Stripes 3 Brown

STRIPES

Notranje stenske ploščice | Indoor wall tiles

Gladka površina | Smooth surface
20x50 cm | 7.8¨x 19.6¨
30x30 cm | 11,8¨x 11,8¨
5x50 cm | 1.9¨x 19.6¨

BARVE | COLORS

STRIPES 52

STRIPES DC PATCHWORK

STRIPES 52B

STRIPES DC FLOWER

STRIPES L FLOWER 5x50 cm


STRIPES MOSAIC 1
30x30 cm

STRIPES B MOSAIC 1
30x30 cm

Priporočene talne ploščice | Recommended floor tiles

STRIPES 3 BROWN
stran | page: 127

ICELAND SILK
stran | page: 93

COTTAGE WHITE
stran | page: 77

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	18	1,80	26,80	44	79,20	1.180
DC	20x50	18	1,80	26,80	22	39,60	590
DC	20x50	15	1,50	22,30			
	30x30	11	0,98	14,5			
	cm	kos / pcs	m	kg			
L	5x50	12	6,00	5,00			

GLAZIRANE PORCELANSKE PLOŠČICE

Glazed porcelain tiles

DIMENZIJE | Dimensions

15 x 60 cm | 5,9¨x 23,6¨
22,5 x 90 cm | 8,9¨x 35.4¨
30 x 60 cm | 11,8¨x 23,6¨
33,8 x 36,4 cm | 13.3¨x 14.1¨
30 x 30 cm | 11,8¨x 11,8¨

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface

Različna grafična lica | Different faces

Mat | Matt

Skladno z zahtevami standarda SIST EN 14411, aneks G skupina BI_a
Classification in accordance with SIST EN 14411 Annex G Group BI_a

KAZALO PO TIPU IZDELKA IN FORMATU

Products index by typology and formats

NATUR 68-69
BARK 70
RIALTO 71
CRAFT 72-73
VINTAGE 74-75
COTTAGE 76-77
NORDIC 78-79
NATIVE 80-81
RUSTIC 82-83
FOREST 84-85
ARC 86
ALT 87
ASPEN 88-89
COUNTRY 90-91

ICELAND 92-97
FINESTONE 98-101
QUARZITE 102-103
MARMETTE 104-105
TERRAZZO 106-107
NAXOS 108-109
DESERT 110-111
LIPICA 112-113
VICENZA 114-115
BESTONE 116-117

CEMENT 118-119

15 x 60 cm
5,9¨x 23,6¨

NATUR 68-69
BARK 70
RIALTO 71
CRAFT 72-73
VINTAGE 74-75

22,5 x 90 cm
8,9¨x 35.4¨

COTTAGE 76-77
NORDIC 78-79
NATIVE 80-81
RUSTIC 82-83

30 x 60 cm
11,8¨x 23,6¨

FOREST 84-85
ARC 86
ALT 87
ASPEN 88-89
COUNTRY 90-91
ICELAND 92-97
FINESTONE 98-101
QUARZITE 102-103
MARMETTE 104-105
TERRAZZO 106-107
NAXOS 108-109
DESERT 110-111
LIPICA 112-113
VICENZA 114-115
BESTONE 116-117
CEMENT 118-119

NATUR

Glazirane porcelanske ploščice | Glazed porcelain tiles

Natur Brown

NATUR

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface

15 x 60 cm | 5,9¨x 23,6¨

M C R11 PEI IV V2 16

BARVE | COLORS

NATUR WHITE

NATUR GREY

NATUR ALMOND

NATUR GOLD

NATUR BROWN

NATUR NUT

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	15x60	10	0,90	17,70	64	57,60	1.130

BARK

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface

15 x 60 cm | 5,9¨x 23,6¨

M B R10 PEI IV V3 19

BARVE | COLORS

BARK BROWN

Bark Brown

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	15x60	10	0,90	17,70	64	57,60	1.130

RIALTO

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface

15 x 60 cm | 5,9¨x 23,6¨

M B R10 PEI IV V3 19

BARVE | COLORS

RIALTO GREY

Rialto Grey

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	15x60	10	0,90	17,70	64	57,60	1.130

CRAFT

Glazirane porcelanske ploščice | Glazed porcelain tiles

Craft Brown

CRAFT

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface

15 x 60 cm | 5,9¨x 23,6¨

M B R10 PEI IV V3 19

BARVE | COLORS

CRAFT BEIGE

CRAFT BROWN

CRAFT GREY

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	15x60	10	0,90	17,70	64	57,60	1.130

VINTAGE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Vintage White

VINTAGE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface

15 x 60 cm | 5,9¨x 23,6¨

M B R10 PEI IV V3 16

BARVE | COLORS

VINTAGE WHITE

VINTAGE GREY

VINTAGE OAK

VINTAGE BROWN

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	15x60	10	0,90	17,70	64	57,60	1.130

COTTAGE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Cottage Gold

COTTAGE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
22,5 x 90 cm | 8,9"x 35.4"

M B R10 PEI IV V2 12

BARVE | COLORS

COTTAGE WHITE

COTTAGE GREY

COTTAGE ALMOND

COTTAGE GOLD

COTTAGE BROWN

COTTAGE NUT

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	22,5x90	6	1,215	23,10	54	65,61	1.250

NORDIC

Glazirane porcelanske ploščice | Glazed porcelain tiles

Nordic Walnut

NORDIC

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
22,5 x 90 cm | 8,9"x 35.4"

M B R10 PEI IV V2 12

BARVE | COLORS

NORDIC WHITE

NORDIC PINE

NORDIC WALNUT

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	22,5x90	6	1,215	23,10	54	65,61	1.250

NATIVE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Native Almond

NATIVE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
22,5 x 90 cm | 8,9"x 35.4"

M B R10 PEI IV V2 12

BARVE | COLORS

NATIVE IVORY

NATIVE ALMOND

NATIVE OAK

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	22,5x90	6	1,215	23,10	54	65,61	1.250

RUSTIC

Glazirane porcelanske ploščice | Glazed porcelain tiles

Rustic Oak

RUSTIC

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
22,5 x 90 cm | 8,9"x 35.4"

M B R10 PEI IV V3 12

BARVE | COLORS

RUSTIC WHITE

RUSTIC GREY

RUSTIC OAK

RUSTIC BROWN

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	22,5x90	6	1,215	23,10	54	65,61	1.250

FOREST

Glazirane porcelanske ploščice | Glazed porcelain tiles

Forest Oak

FOREST

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V3 10

BARVE | COLORS

FOREST WHITE

FOREST GREY

FOREST OAK

FOREST BROWN

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

ARC

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V3 14

BARVE | COLORS

ARC BROWN

Arc Brown

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

ALT

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

ALT GREY

Alt Grey

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

NEW

ASPEN

Glazirane porcelanske ploščice | Glazed porcelain tiles

Aspen Grey

ASPEN

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V2 6

BARVE | COLORS

ASPEN BROWN

ASPEN GREY

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

COUNTRY

Glazirane porcelanske ploščice | Glazed porcelain tiles

Country Brown

COUNTRY

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

COUNTRY BEIGE

COUNTRY BROWN

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

NEW

ICELAND

Glazirane porcelanske ploščice | Glazed porcelain tiles

Iceland Silk, Iceland Mist

ICELAND

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨
33,8 x 36,4 cm | 13.3¨x 14.1¨
30 x 30 cm | 11,8¨x 11,8¨

M B R10 PEI IV V2 12

BARVE | COLORS

ICELAND SILK

ICELAND SI MOSAIC 4 30 x 60 cm

ICELAND SI MOSAIC 7
33,8x 36,4 cm



ICELAND SI MOSAIC 5
30 x 30 cm

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	30x60	7	1,26	23,00	40	50,40	920
	30x60	5	0,75	10,60			
	33,8x 36,4	10	0,97	15,60			
	30x30	11	0,98	16,60			

NEW

ICELAND

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface

30 x 60 cm | 11,8"x 23,6"
33,8 x 36,4 cm | 13.3"x 14.1"
30 x 30 cm | 11,8"x 11,8"

M B R10 PEI IV V2 12

BARVE | COLORS

ICELAND MIST

ICELAND MI MOSAIC 4 30 x 60 cm

ICELAND MI MOSAIC 7
33,8x 36,4 cm

ICELAND MI MOSAIC 5
30 x 30 cm

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920
	30x60	5	0,75	10,60			
	33,8x 36,4	10	0,97	15,60			
	30x30	11	0,98	16,60			

ICELAND

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨
33,8 x 36,4 cm | 13.3¨x 14.1¨
30 x 30 cm | 11,8¨x 11,8¨

M B R10 PEI IV V2 12

BARVE | COLORS

ICELAND CREAM

ICELAND CR MOSAIC 4 30 x 60 cm

ICELAND CR MOSAIC 7
33,8x 36,4 cm



ICELAND CR MOSAIC 5
30 x 30 cm

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	30x60	7	1,26	23,00	40	50,40	920
	30x60	5	0,75	10,60			
	33,8x 36,4	10	0,97	15,60			
	30x30	11	0,98	16,60			

NEW

ICELAND

Glazirane porcelanske ploščice | Glazed porcelain tiles

Iceland Sand, Iceland SA Mosaic 5

ICELAND

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨
33,8 x 36,4 cm | 13.3¨x 14.1¨
30 x 30 cm | 11,8¨x 11,8¨

M B R10 PEI IV V2 12

BARVE | COLORS

ICELAND SAND

ICELAND SA MOSAIC 4 30 x 60 cm

ICELAND SA MOSAIC 7
33,8x 36,4 cm



ICELAND SA MOSAIC 5
30 x 30 cm

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	30x60	7	1,26	23,00	40	50,40	920
	30x60	5	0,75	10,60			
	33,8x 36,4	10	0,97	15,60			
	30x30	11	0,98	16,60			

FINESTONE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Finestone Brown

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	30x60	7	1,26	23,00	40	50,40	920
	30x60	5	0,75	10,60			
	30x30	11	0,98	16,60			

FINESTONE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8"x 23,6"
30 x 30 cm | 11,8"x 11,8"

M B R10 PEI IV V3 12

BARVE | COLORS

FINESTONE BEIGE

FINESTONE BE MOSAIC 4 30 x 60 cm



FINESTONE BE MOSAIC 5
30 x 30 cm

FINESTONE BROWN

FINESTONE BR MOSAIC 4 30 x 60 cm

FINESTONE BR MOSAIC 5
30 x 30 cm

FINESTONE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Finestone LG Mosaic 1, Finestone White

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920
	30x60	5	0,75	10,60			
	30x30	11	0,98	16,60			

FINESTONE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨
30 x 30 cm | 11,8¨x 11,8¨

M B R10 PEI IV V3 12

BARVE | COLORS

FINESTONE WHITE

FINESTONE W MOSAIC 4 30 x 60 cm



FINESTONE W MOSAIC 5
30 x 30 cm

FINESTONE LIGHT GREY

FINESTONE LG MOSAIC 4 30 x 60 cm

FINESTONE LG MOSAIC 5
30 x 30 cm

QUARZITE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Quarzite Pearl

OPIS DESCRIPTION							
	cm	**kos / pcs**	**m² / Mq**	**kg**	**paketov / boxes**	**m² / Mq**	**kg**
	30x60	7	1,26	23,00	40	50,40	920
	30x60	5	0,75	10,60			
	30x30	11	0,98	16,60			

QUARZITE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨
30 x 30 cm | 11,8¨x 11,8¨

M B R10 PEI IV V3 16

BARVE | COLORS

QUARZITE SAND

QUARZITE S MOSAIC 4 30 x 60 cm



QUARZITE S MOSAIC 5
30 x 30 cm

QUARZITE PEARL

QUARZITE P MOSAIC 4 30 x 60 cm

QUARZITE P MOSAIC 5
30 x 30 cm

MARMETTE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Marmette Grey

MARMETTE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V3 16

BARVE | COLORS

MARMETTE BEIGE

MARMETTE GREY

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

TERRAZZO

Glazirane porcelanske ploščice | Glazed porcelain tiles

Terrazzo Beige

TERRAZZO

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V2 16

BARVE | COLORS

TERRAZZO BEIGE

TERRAZZO GREY

TERRAZZO GRAPHITE

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

NEW

NAXOS

Glazirane porcelanske ploščice | Glazed porcelain tiles

Naxos Graphite, Naxos Bone

NAXOS

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V2 12

BARVE | COLORS

NAXOS BONE

NAXOS HONEY

NAXOS SMOKE

NAXOS GRAPHITE

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

DESERT

Glazirane porcelanske ploščice | Glazed porcelain tiles

Desert Grey

DESERT

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V3 16

BARVE | COLORS

DESERT BEIGE

DESERT BROWN

DESERT GREY

DESERT ASH

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

LIPICA

Glazirane porcelanske ploščice | Glazed porcelain tiles

Lipica Smoke

LIPICA

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V2 16

BARVE | COLORS

LIPICA TAUPE

LIPICA SMOKE

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	30x60	7	1,26	23,00	40	50,40	920

VICENZA

Glazirane porcelanske ploščice | Glazed porcelain tiles

Vicenza Beige

VICENZA

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V1 12

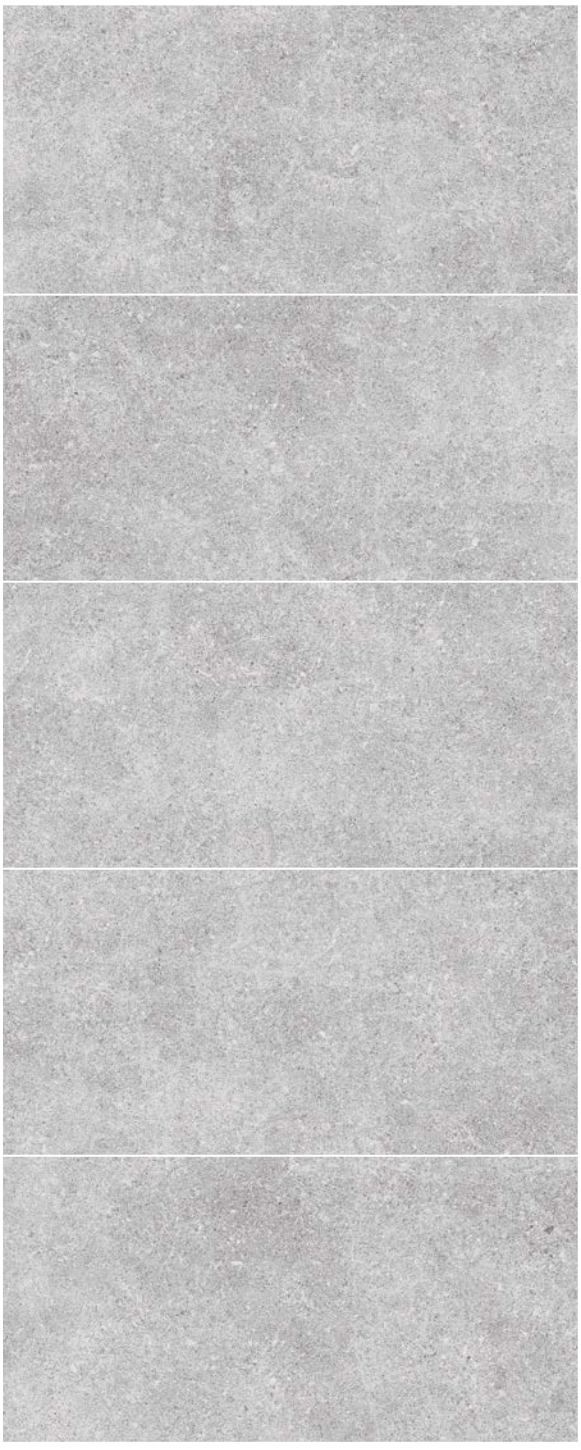

BARVE | COLORS

VICENZA BEIGE

VICENZA GREY

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

BESTONE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Bestone Grey

BESTONE

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V3 16

BARVE | COLORS

BESTONE BEIGE

BESTONE GREY

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	30x60	7	1,26	23,00	40	50,40	920

CEMENT

Glazirane porcelanske ploščice | Glazed porcelain tiles

Cement Taupe

CEMENT

Glazirane porcelanske ploščice | Glazed porcelain tiles

Reliefna površina | Structured surface
30 x 60 cm | 11,8¨x 23,6¨

M B R10 PEI IV V2 10

BARVE | COLORS

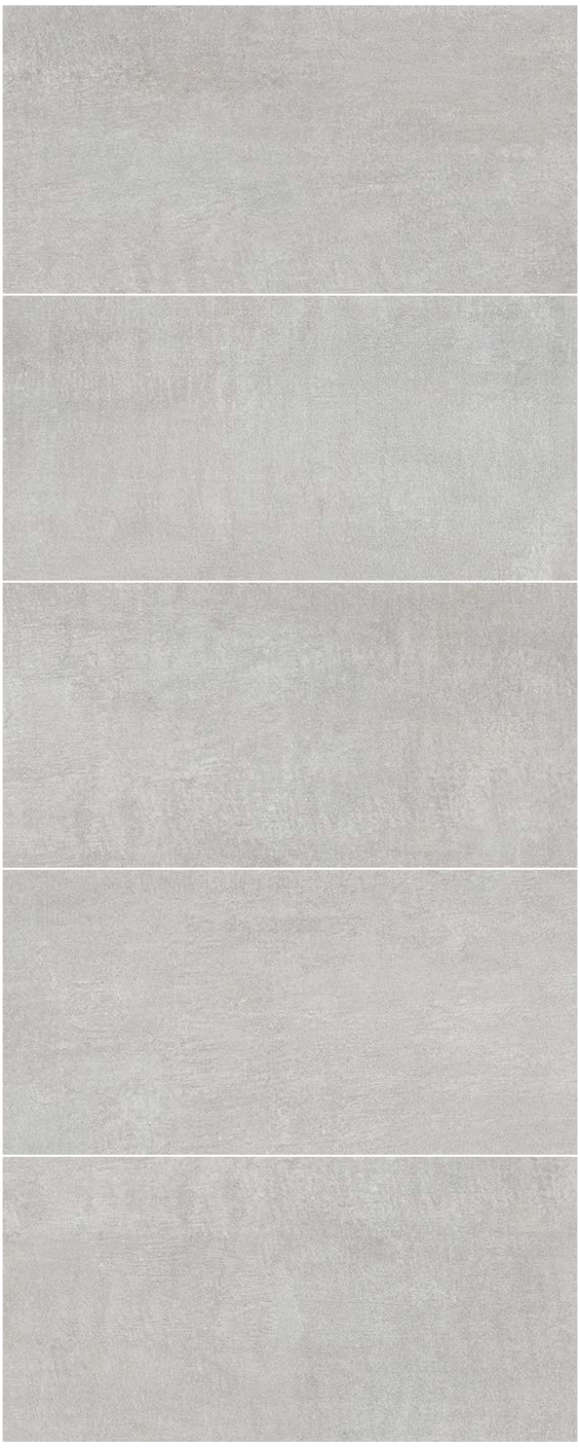

CEMENT TAUPE

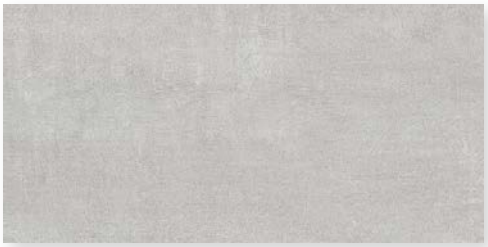

CEMENT GREY

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
❄	30x60	7	1,26	23,00	40	50,40	920

PROJEKTNE STENSKE PLOŠČICE

Project wall tiles

DIMENZIJE | Dimensions

25 x 75 cm | 9.8¨x 29.5¨
25 x 60 cm | 9.8¨x 23.6¨

Notranje stenske ploščice | Indoor wall tiles

Reliefna ali gladka površina
Structured or smooth surface

Različna grafična lica | Different faces

Mat ali sijajno
Matt or glossy

Skladno z zahtevami standarda SIST EN 14411, aneks L skupina BIII
Classification in accordance with SIST EN 14411 Annex L Group BIII

KAZALO PO TIPU IZDELKA IN FORMATU

Products index by typology and formats

Enobarvno
Monocolor

CANDY 75 WHITE 123
ESSENCE 75 WHITE 123
DREAM 65 WHITE 123
LUCY 65 WHITE 123
SURFACE 65 WHITE 123

Cement
Concrete

AGRA 75 WHITE 123
VISUAL 65 WHITE 123

Les
Wood

DESIRE 65 WHITE 123

25 x 75 cm
9.8¨ x 29.5¨

CANDY 75 WHITE 123
AGRA 75 WHITE 123
ESSENCE 75 WHITE 123

25 x 60 cm
9.8¨ x 23.6¨

DREAM 65 WHITE 123
LUCY 65 WHITE 123
VISUAL 65 WHITE 123
SURFACE 65 WHITE 123
DESIRE 65 WHITE 123

PROJEKTNE PLOŠČICE | Project tiles

Notranje stenske ploščice | Indoor wall tiles

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	25x75	8	1,50	23,30	42	63,00	980
	25x60	9	1,35	20,60	64	86,40	1.320

PROJEKTNE PLOŠČICE | Project tiles

Notranje stenske ploščice | Indoor wall tiles

25x75 cm | 9.8¨x 29,5¨
Gladka površina | Smooth surface

G

CANDY 75 WHITE

M

AGRA 75 WHITE

M

ESSENCE 75 WHITE

25x60 cm | 9.8¨x 23,6¨
Gladka površina | Smooth surface

G

DREAM 65 WHITE

G

LUCY 65 WHITE

M

VISUAL 65 WHITE

25x60 cm | 9.8¨x 23,6¨
Reliefna površina | Structured surface

M

SURFACE 65 WHITE

M

DESIRE 65 WHITE

NOTRANJE TALNE PLOŠČICE

Indoor floor tiles

DIMENZIJE | Dimensions

33,3˙x 33,3˙cm | 13.1¨ x 13.1¨

Notranje talne ploščice | Indoor floor tiles

Reliefna ali gladka površina
Structured or smooth surface

Različna grafična lica | Different faces

Mat ali sijajno
Matt or glossy

Skladno z zahtevami standarda SIST EN 14411, aneks K skupina BII$_b$
Classification in accordance with SIST EN 14411 Annex K Group BII$_b$

KAZALO PO TIPU IZDELKA IN FORMATU

Products index by typology and formats

Enobarvno
Monocolor

AMOR 3 BLUE 126
BLOSSOM 3 BLUE 126
BLOSSOM 3 BROWN 126
LUCY 3 GREY 126
LUCY 3 VIOLET 126
LUCY 3 BLACK 126
VELA 3 GREEN 127

Tekstil
Textille

ADORE 3 BROWN 126
ADORE 3 GREY 126
DREAM 3 COFFEE 126

Kamen
Stone

MADISON 3 GREY 126
STREAMS 3 BROWN 127
STREAMS 3 GREY 127
STREAMS 3 WHITE 127
STRIPES 3 BROWN 127
VENUS 3 BEIGE 127

Cement
Concrete

CHARM 3 BROWN 126
CHARM 3 GREY 126
SENSO 3 GREY 127

33,3˙x 33,3˙cm
13.1¨ x 13.1¨

AMOR 3 BLUE 126
ADORE 3 BROWN 126
ADORE 3 GREY 126
BLOSSOM 3 BLUE 126
BLOSSOM 3 BROWN 126
CHARM 3 BROWN 126
CHARM 3 GREY 126
DREAM 3 COFFEE 126
LUCY 3 GREY 126
LUCY 3 VIOLET 126
LUCY 3 BLACK 126
MADISON 3 GREY 126
SENSO 3 GREY 127
STREAMS 3 BROWN 127
STREAMS 3 GREY 127
STREAMS 3 WHITE 127
STRIPES 3 BROWN 127
VELA 3 GREEN 127
VENUS 3 BEIGE 127

TALNE PLOŠČICE | Floor tiles

Notranje talne ploščice | Indoor floor tiles

33,3˙ x 33,3˙cm | 13.1¨x 13.1¨
Gladka površina | Smooth surface

AMOR 3 BLUE

ADORE 3 BROWN

ADORE 3 GREY

BLOSSOM 3 BLUE

BLOSSOM 3 BROWN

CHARM 3 BROWN

CHARM 3 GREY

DREAM 3 COFFEE

LUCY 3 BLACK

LUCY 3 GREY

LUCY 3 VIOLET

MADISON 3 GREY

TALNE PLOŠČICE | Floor tiles

Notranje talne ploščice | Indoor floor tiles

33,3˙ x 33,3˙cm | 13.1¨x 13.1¨
Gladka površina | Smooth surface

SENSO 3 GREY


STREAMS 3 BROWN

STREAMS 3 GREY


STREAMS 3 WHITE


STRIPES 3 BROWN

VELA 3 GREEN


VENUS 3 BEIGE

OPIS DESCRIPTION							
	cm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	33,3˙ x 33,3˙	12	1,33˙	22,20	72	96,00	1.600

TEHNIČNE INFORMACIJE

Technical informations

Glazirane porcelanske ploščice | Glazed porcelain tiles

Notranje keramične ploščice | Indoor ceramic tiles

Tehnične informacije Technical informations

TEHNIČNE LASTNOSTI STENSKE IN TALNE PLOŠČICE 130

Technical features wall and floor tiles 131

TEHNIČNE LASTNOSTI GLAZIRANE PORCELANSKE PLOŠČICE 132

Technical features glazed porcelain tiles 133

TEHNIČNE INFORMACIJE 134-136

Technical informations 137-139

Navodila in nasveti Installation guide and advice

FUGIRANJE 140

REKLAMACIJE 140

VZDRŽEVANJE 141

OPOMBA 141

Grouting 142

Complaints 142

Maitenance 143

Note 143

PRIPOROČENI NAČINI POLAGANJA 144

Laying solutions 144

Logistični podatki Logistic data

PAKIRANJE GOTOVIH IZDELKOV 145-146

Packing of finished products 145-146

Dodatne informacije Additional informations

TEHNIČNI NAČRTI MOZAIKOV 147

Technical design for mosaics 147

TEHNIČNE LASTNOSTI STENSKE IN TALNE PLOŠČICE

SKLADNOST S STANDARDOM			STENSKE PLOŠČICE Skupina B III SIST EN 14411, Dodatek L		TALNE PLOŠČICE Skupina B II $_b$ SIST EN 14411, Dodatek K	
Simbol	**Lastnost**	**Testna metoda**	**Zahteve standarda**	**Gorenje Keramika**	**Zahteve standarda**	**Gorenje Keramika**
	Dolžina in širina	ISO 10545-2	± 0,5 % ± 2,0 mm	ustreza	± 0,6 % ± 2,0 mm	ustreza
	Debelina	ISO 10545-2	± 10 % ± 0,5 mm	ustreza	± 5,0 % ± 0,5 mm	ustreza
	Ravnost robov	ISO 10545-2	± 0,3 % ± 1,5 mm	ustreza	± 0,5 % ± 1,5 mm	ustreza
	Pravokotnost	ISO 10545-2	± 0,5 % ± 2,0 mm	ustreza	± 0,5 % ± 2,0 mm	ustreza
	Ravnost površine	ISO 10545-2	+ 0,5 % / - 0,3 % + 2,0 mm / - 1,5 mm	ustreza	± 0,5 % ± 2,0 mm	ustreza
	Kakovost površine	ISO 10545-2	min. 95% brez vidnih napak	ustreza	min. 95% brez vidnih napak	ustreza
	Vpijanje vode	ISO 10545-3	E > 10 %	ustreza	6 < E ≤ 10 %	ustreza
	Upogibna trdnost	ISO 10545-4	≥ 12 N/mm² (debelina≥7,5 mm) ≥ 15 N/mm² (debelina<7,5 mm)	> 20 N/mm²	≥ 18 N/mm²	> 25 N/mm²
	Zlomna sila	ISO 10545-4	≥ 600 N (debelina≥7,5 mm) ≥ 200 N (debelina<7,5 mm)	ustreza	≥ 800 N (debelina≥7,5 mm) ≥ 500 N (debelina<7,5 mm)	ustreza
PEI	Odpornost proti obrabi (PEI)	ISO 10545-7	razred 1-5	razred 2-4	razred 1-5	razred 2-4
	Odpornost proti hitrim tempreraturnim razlikam	ISO 10545-9	brez vidnih napak	ustreza	brez vidnih napak	ustreza
	Odpornost proti lasastim razpokam	ISO 10545-11	zahtevana	ustreza	zahtevana	ustreza
	Odpornost proti nizkim koncentracijam kislin in alkalij	ISO 10545-13	min. B	A	min. B	A
	Odpornost proti madežem	ISO 10545-14	min. razred 3	razred 5	min. razred 3	razred 5

TECHNICAL FEATURES WALL AND FLOOR TILES

CONFORMITY TO NORMS			WALL TILES Group B III SIST EN 14411, Annex L			FLOOR TILES Group B II $_b$ SIST EN 14411, Annex K		
Symbol	**Characteristic**	**Test method**	**Standard requirements**		**Gorenje Keramika**	**Standard requirements**		**Gorenje Keramika**
	Length and width	ISO 10545-2	± 0,5 %	± 2,0 mm	conforms	± 0,6 %	± 2,0 mm	conforms
	Thickness	ISO 10545-2	± 10 %	± 0,5 mm	conforms	± 5,0 %	± 0,5 mm	conforms
	Straightness of sides	ISO 10545-2	± 0,3 %	± 1,5 mm	conforms	± 0,5 %	± 1,5 mm	conforms
	Rectangularity	ISO 10545-2	± 0,5 %	± 2,0 mm	conforms	± 0,5 %	± 2,0 mm	conforms
	Surface flatness	ISO 10545-2	+ 0,5 % / - 0,3 % + 2,0 mm / - 1,5 mm		conforms	± 0,5 %	± 2,0 mm	conforms
	Surface quality	ISO 10545-2	min. 95 % no visible defects		conforms	min. 95 % no visible defects		conforms
	Water absorption	ISO 10545-3	E > 10 %		conforms	6 < E ≤ 10 %		conforms
	Modulus of rupture	ISO 10545-4	≥ 12 N/mm² (thickness≥7,5 mm) ≥ 15 N/mm² (thickness<7,5 mm)		> 20 N/mm²	≥ 18 N/mm²		> 25 N/mm²
	Breaking strength	ISO 10545-4	≥ 600 N/mm² (thickness≥7,5 mm) ≥ 200 N/mm² (thickness<7,5 mm)		conforms	≥ 800 N/mm² (thickness≥7,5 mm) ≥ 500 N/mm² (thickness<7,5 mm)		conforms
PEI	Abrasion resistance (PEI)	ISO 10545-7	class 1-5		class 2-4	class 1-5		class 2-4
	Thermal shock resistance	ISO 10545-9	no visible defects		conforms	no visible defects		conforms
	Crazing resistance	ISO 10545-11	no crazing		conforms	no crazing		conforms
	Resistance to low acid and alkaline concentrations	ISO 10545-13	min. B		A	min. B		A
	Resistance to staining	ISO 10545-14	min. class 3		class 5	min. class 3		class 5

TEHNIČNE LASTNOSTI GLAZIRANE PORCELANSKE PLOŠČICE

SKLADNOST S STANDARDOM			GLAZED PORCELAIN TILES Group B I [a] SIST EN 14411, Annex G	
Simbol	**Lastnost**	**Testna metoda**	**Zahteve standarda**	**Gorenje Keramika**
	Dolžina in širina	ISO 10545-2	± 0,6 % ± 2,0 mm	ustreza
	Debelina	ISO 10545-2	± 5,0 % ± 0,5 mm	ustreza
	Ravnost robov	ISO 10545-2	± 0,5 % ± 1,5 mm	ustreza
	Pravokotnost	ISO 10545-2	± 0,5 % ± 2,0 mm	ustreza
	Ravnost površine	ISO 10545-2	± 0,5 % ± 2,0 mm	ustreza
	Kakovost površine	ISO 10545-2	min. 95% brez vidnih napak	ustreza
	Vpijanje vode	ISO 10545-3	$E_b \leq 0,5$ %	ustreza
	Upogibna trdnost	ISO 10545-4	≥ 35 N/mm^2	ustreza
	Zlomna sila	ISO 10545-4	≥ 1.300 N	ustreza
PEI	Odpornost proti obrabi (PEI)	ISO 10545 - 7	PEI razred 0-5	PEI razred 4
	Odpornost proti zamrzovanju	ISO 10545-12	Zahtevana	ustreza
	Odpornost proti lasastim razpokam	ISO 10545-11	zahtevana	ustreza
	Odpornost proti nizkim koncentracijam kislin in alkalij	ISO 10545-13	min. B	A
	Odpornost proti madežem	ISO 10545-14	Min. razred 3	Razred 5
R10	Drsnost	DIN 51130 DIN 51097	Razred R9-R13 Skupina 0-C	Glej katalog

TECHNICAL FEATURES GLAZED PORCELAIN TILES

	CONFORMITY TO NORMS		GLAZED PORCELAIN TILES Group B I [a] SIST EN 14411, Annex G	
Symbol	**Characteristic**	**Test method**	**Standard requirements**	**Gorenje Keramika**
	Length and width	ISO 10545-2	± 0,6 % ± 2,0 mm	conforms
	Thickness	ISO 10545-2	± 5,0 % ± 0,5 mm	conforms
	Straightness of sides	ISO 10545-2	± 0,5 % ± 1,5 mm	conforms
	Rectangularity	ISO 10545-2	± 0,5 % ± 2,0 mm	conforms
	Surface flatness	ISO 10545-2	± 0,5 % ± 2,0 mm	conforms
	Surface quality	ISO 10545-2	min. 95% no visible defects	conforms
	Water absorbing	ISO 10545-3	$E_b \leq 0,5$ %	conforms
	Modulus of rupture	ISO 10545-4	≥ 35 N/mm²	conforms
	Breaking strength	ISO 10545-4	≥ 1.300 N	conforms
PEI	Resistance to surface abrasion	ISO 10545 - 7	PEI Class 0-5	PEI Class 4
	Crazing resistance	ISO 10545-11	No crazing	conforms
	Frost resistance	ISO 10545-12	Required	conforms
	Resistance to low acid and alkaline concentrations	ISO 10545-13	min. B	A
	Resistance to stains	ISO 10545-14	Min. class 3	Class 5
R10	Slipperiness	DIN 51130 DIN 51097	Class R9-R13 Group 0-C	See catalogue

Spoštovani kupci!

V pomoč za preprečitev morebitnih pritožb strank vam priporočamo, da vsem, ki se oskrbujejo s keramičnimi ploščicami Gorenje Keramika, ponudite kopijo s temi informacijami. Zahvaljujemo se vam za sodelovanje.

Standardi

Gorenje Keramika proizvaja suho stisnjene talne keramične ploščice v tehnologiji monocoture, stenske keramične ploščice v tehnologiji monoporose, dekorne keramične ploščice ter glazirane porcelanske ploščice v tehnologiji gres porcellanato.

- Standard SIST EN 14411 se uporablja kot nacionalni standard, ki ga je objavil Evropski odbor za standardizacijo CEN.
- Ta standard je enak mednarodnemu standardu EN 14411, ki se uporablja v vseh državah članicah CEN v Evropi.
- Standard SIST EN 14411: Keramične ploščice – Definicije, razvrstitev, lastnosti, vrednotenje skladnosti in označevanje, določa izraze in opredeljuje lastnosti za keramične ploščice najboljše komercialne kakovosti (1. kakovostni razred).

V skladu s standardom se keramične ploščice glede na metodo oblikovanja in vpijanje vode razvrščajo v skupine:

METODA OBLIKOVANJA	**Suho stisnjene keramične ploščice**				
Vpijanje vode	E ≤ 0,5 %	0,5 % < E ≤ 3 %	3 % < E ≤ 6 %	6 % < E ≤ 10 %	E > 10 %
Skupina	B I_a	B I_b	B II_a	B II_b	B III

Keramične ploščice Gorenje Keramika so razdeljene v naslednje skupine:
- Skupina BII_b, Dodatek K (talne keramične ploščice)
- Skupina BIII, Dodatek L (stenske keramične ploščice)
- Skupina BI_a, Dodatek G (glazirane porcelanske ploščice)

Odpornost proti obrabi keramičnih ploščic in njihova razvrstitev v PEI razrede

- Odpornost proti obrabi je lastnost, ki se upošteva pri izbiri talnih keramičnih ploščic, namenjenih za vgradnjo na določeno mesto.
- Odpornost proti obrabi kaže lastnost glazirane površine keramične ploščice glede na površinsko obrabo. Odpornost proti obrabi se določa s pomočjo vrtenja abrazivnega medija na površini keramične ploščice ter z ocenjevanjem obrabe s pomočjo vizualne primerjave videza keramične ploščice, ki je bila izpostavljena obrabi, in keramične ploščice, ki pri testiranju ni bila izpostavljena obrabi
- Izdelek se ocenjuje po lestvici od 0 do 5 (5 je najvišji razred odpornosti proti obrabi površine glaziranih keramičnih ploščic)

Razvrstitev v PEI razrede glaziranih talnih in porcelanskih ploščic glede na njihovo odpornost proti obrabi.

PEI	**Možnost vgradnje**
0	Glazirane keramične ploščice tega razreda niso priporočljive za talne obloge.
1	Keramične ploščice so primerne za tla, kjer večinoma hodimo v obuvalih z mehkimi podplati ali bosi, kjer ni umazanije (npr. kopalnice in spalnice brez neposrednega dostopa od zunaj).
2	Keramične ploščice so primerne za tla, kjer hodimo v obuvalih z mehkimi ali normalnimi podplati in kjer redkeje pride do manjše količine umazanije, ki lahko povzroči razenje keramičnih ploščic (na primer bivalni prostori, niso pa primerne za kuhinje, hodnike ali bolj obremenjene prostore). Niso primerne za hojo v obutvi z grobimi podplati, kot so na primer podkovani čevlji.
3	Keramične ploščice so primerne za tla, kjer hodimo z normalno obutvijo in kjer je lahko pogosto prisotna tudi manjša količina umazanije, ki lahko povzroči razenje keramičnih ploščic (kuhinje, hodniki, prehodi, balkoni in lože). Niso primerne za hojo v obutvi z grobimi podplati, kot so na primer podkovani čevlji.
4	Keramične ploščice so primerne za tla, kjer je redna pohodna obremenitev in je prisotna tudi umazanija, ki lahko povzroči razenje keramičnih ploščic. Razmere so težje, kot v razredu 3 (na primer vhodi, javne kuhinje, hoteli, razstavne in prodajne dvorane).
5	Keramične ploščice so primerne za tla s stalno veliko pohodno obremenitvijo in grobo umazanijo, torej v najslabših razmerah, za kar so keramične ploščice še lahko primerne (npr. javna področja, kot so nakupovalni centri, letališke in hotelske avle, javne pešpoti ter industrijska uporaba).

TEHNIČNE INFORMACIJE

Ta razvrstitev je veljavna za uporabo v običajnih pogojih. Informacija o odpornosti proti obrabi je navedena poleg talnih keramičnih ploščic.

Drsnost glaziranih porcelanskih ploščic

R:

PROTI DRSNE LASTNOSTI (DIN 51130)
To je nemški standard, ki meri odpornost proti zdrsu talnih oblog za delovne prostore in področja dejavnosti z nevarnostjo zdrsa. Preskusna metoda vključuje drsenje na rampi nagnjeni pod različnimi koti. Klasifikacijski sistem za protizdrsne lastnosti je razdeljen na 5 ocen: R9, R10, R11, R12, R13.

A+B+C:

DRSNOST NA MOKRI PODLAGI (DIN 51097):
To je nemški standard za merjenje protidrsnih lastnosti na mokrih podlagah. Metoda preizkušanja vključuje bosonogo stopanje po rampi, ki je nagnjena pod različnimi koti, po njej pa teče voda. Klasifikacijski sistem za protidrsne lastnosti je razdeljen na tri ocene: A, B (A + B), C (A + B + C).

SKLADNOST S STANDARDOM		GLAZIRANE PORCELANSKE PLOŠČICE	
Lastnost	**Testna metoda**	**Zahteve standarda Povprečni kot zdrsa**	**Zahteve standarda Razvrstitev po razredih**
Protizdrsne lastnosti-Področja dejavnosti z nevarnostjo zdrsa-Hoja z boso nogo-Test na rampi	DIN 51130	$6° \leq \partial_{ges} \leq 10°$	R9
		$10° \leq \partial_{ges} \leq 19°$	R10
		$19° \leq \partial_{ges} \leq 27°$	R11
		$27° \leq \partial_{ges} \leq 35°$	R12
		$\partial_{ges} > 35°$	R13
Drsnost na mokri podlagi-Hoja z boso nogo-Test na rampi	DIN 51097	< 12	0
		≥ 12°	A
		≥ 18°	B (A+B)
		≥ 24°	C (A+B+C)

Drsnost keramičnih ploščic z nihalom - Pendulum test

Drsnost keramičnih ploščic je tehnična lastnost, pomembna za talne keramične ploščice, ki prihajajo v stik z vodo in imajo potencialno visoko raven drsnosti. Preskusna metoda za določanje drsnosti keramičnih ploščic z nihalom se imenuje Pendulum test, PTV. Naprava za določitev drsnosti posredno ali neposredno meri koeficient trenja med materialom talne podlage in materialom, ki predstavlja podplat čevlja.

Razred drsnosti	$PTV_{SUH\ ALI\ MOKER}$	Opis
1	0–24	Večja možnost zdrsa
2	25–35	Zmerna možnost zdrsa
3	36+	Manjša možnost zdrsa

PTV_S – drsnost keramičnih ploščic na suhi podlagi
PTV_M – drsnost keramičnih ploščic na mokri podlagi

Videz keramičnih ploščic in njihova izbira glede na mesto vgradnje

- Pri izbiri keramičnih ploščic je treba poleg vizualnih značilnosti (barva, dekor, tekstura, dekorativni elementi,...) upoštevati tudi tehnične značilnosti.
- V dodatku standarda SIST EN 14411 so podane minimalne tehnične zahteve glede njihovih tehničnih lastnosti: dimenzije, kakovost vidnih površin, fizikalne in kemijske lastnosti.
- Skladnost keramičnih ploščic je testirana z evropskimi standardi, njihove lastnosti pa navede proizvajalec. Metode za testiranje, ki se uporabljajo za določanje lastnosti keramičnih ploščic, so opisane v standardu EN ISO 10545.
- Vse lastnosti so navedene na kartonski embalaži in v Izjavi o lastnostih (DoP), ki predstavlja glavni vir informacij za kupca.

Pakiranje, označevanje, identifikacija in skladiščenje izdelkov

- Keramične ploščice Gorenje Keramika so razvrščene v kakovostne razrede in pakirane v kartonsko embalažo.
- Na kartonski embalaži s keramičnimi ploščicami so podatki, potrebni za identifikacijo izdelka: dimenzija in ime keramične ploščice, kaliber, niansa, datum proizvodnje, količina pakiranja (m^2 ali kos).
- Kaliber določa dovoljena dimenzijska odstopanja med dejansko in proizvodno mero keramične ploščice. Velikost keramične ploščice, določene za izdelavo, imenujemo proizvodna mera.
- V skladu s standardom EN 14411 so v procesu proizvodnje keramičnih ploščic minimalne spremembe barvnih nians neizogibne. Pri nakupu je treba biti pozoren, da so vse keramične ploščice, namenjene za vgradnjo na eni površini, iste nianse.
- Na zahtevo kupca se na embalažo natisne 13-mestna EAN črtna koda. Keramične ploščice so pakirane v kartonske škatle in zložene na paleto.
- Da lahko zagotovimo sledljivost izdelka, mora biti le-ta v originalni embalaži do začetka vgradnje.
- Neprimerno rokovanje lahko povzroči poškodbe na izdelku (lomi, okruški, razpoke,...).
- Izdelek, ki bo skladiščen dlje časa na prostem, mora biti ustrezno zaščiten pred zmrzovanjem.

TECHNICAL INFORMATIONS

Dear Buyers,

In order to prevent complaints from the customers, we recommend you to copy this document with information and deliver it to your customers, buying Gorenje Keramika tiles. Thank you for your cooperation.

Standards

Gorenje Keramika dry-pressed tiles are manufactured with monocotura technology, wall tiles are manufactured with monoporose technology as well as decor tiles and glazed porcelain tiles with gres porcellanato technology.

- Standard SIST EN 14 411 is used as national standard, as published by the European Council for CEN standardization.
- This standard corresponds to the standard EN 14 411, which is in use in all member states in Europe, which are members of CEN.
- Standard SIST EN 14 411: Ceramic tiles - Definitions, classification, characteristics, evaluation of conformity and marking, defines terms and characteristics for ceramic tiles of premium class (1st quality class).

In accordance with the applicable standard, the tiles are classified in groups, considering the shaping technique and water absorption:

SHAPING METHOD	**Dry-pressed ceramic tiles**				
Water absorption	E ≤ 0,5 %	0,5 % < E ≤ 3 %	3 % < E ≤ 6 %	6 % < E ≤ 10 %	E > 10 %
Group	B Ia	B Ib	B IIa	B IIb	B III

Ceramic tiles Gorenje Keramika are categorised in three groups:
- Group BII_b, Annex K (floor tiles)
- Group BIII, Annex L (wall tiles)
- Group BI_a, Annex G (glazed porcelain tiles)

Resistance to abrasion of glazed tiles and their classification in PEI classes

- Resistance to abrasion is a characteristic, which should be considered when selecting the floor tiles to be installed in specific place;
- Resistance to abrasion demonstrates characteristic of the glazed surface of the tile resistant to abrasion. Resistance to abrasion is determined by means of rotating the abrasive medium on the surface of the ceramic followed by evaluating the abrasion effect by visually comparing the appearance of the tile subjected to abrasion and the tile that was not subjected to abrasion.
- The product is graded from 0 to 5 (5 is the highest grade of resistance to abrasion of the glazed tile surface).

Grading to PEI classes of glazed floor tiles considering resistance to abrasion

PEI	**Installation options**
0	Glossy tiles, not recommended for use as floor tiles.
1	Tiles are recommended for floors where traffic is made mostly with bear foot or soft soles, no dirt present (e.g. bathrooms and bedrooms, no direct access from outside).
2	Tiles are recommended for floors where traffic is made mostly with soft or normal soles, with occasional dirt present in smaller extent, which can cause abrasion of tiles (e.g. living rooms; but not for kitchen, hallways or rooms with frequent traffic). Not suitable for traffic with shoes with rough soles, heavy-duty shoes.
3	Tiles are recommended for floors where traffic is made mostly with normal footwear, with frequent presence of smaller amount of dirt, which can cause abrasion of tiles (e.g. kitchen, hallways, passages, balconies and loggias). Not suitable for traffic with shoes with rough soles, like heavy-duty shoes.
4	Tiles are recommended for floors with regular traffic load, with presence of dirt, which can cause abrasion of tiles. Conditions are more harsh than in class 3 (e.g. public kitchens, entrance, hotels, sales areas, exhibition rooms).

5	Tiles are recommended for floors with permanent and frequent traffic with presence of dirt, very harsh conditions, but still appropriate for use of tiles 3 (e.g. public areas, like shopping malls, airport and hotel hallways, public pathways, industrial use).

This classification applies in case of use under normal conditions. Information concerning resistance to abrasion is defined next to floor ceramic tiles.

Slipperiness of glazed porcelain tiles

R:

ANTI-SLIP PROPERTIES (DIN 51130):
This is a German standard that measures the slip resistance of floor coverings for workrooms and fields of activities with slip danger. The testing method involves treading on a ramp inclined at various angles. The classification system for antislip properties is divided into 5 ratings: R9, R10, R11, R12, R13.

A+B+C:

ANTI-SLIP PROPERTIES ON WET SURFACES (DIN 51097):
This is a German standard for measuring anti-slip properties in wet areas. The testing method involves treading barefoot on a ramp inclined at various angles with water running over it. The classification system for antislip properties is divided into 3 ratings: A, B (A+B), C (A+B+C).

CONFORMITY TO NORMS		GLAZED PORCELAIN TILES	
Characteristic	**Test method**	**Standard requirements Average slip angle**	**Standard requirements Class classification**
Anti-slip properties-Workrooms and fields of activities with raised slip danger-Walking method-Ramp test	DIN 51130	$6° \leq \partial_{ges} \leq 10°$	R9
		$10° \leq \partial_{ges} \leq 19°$	R10
		$19° \leq \partial_{ges} \leq 27°$	R11
		$27° \leq \partial_{ges} \leq 35°$	R12
		$\partial_{ges} > 35°$	R13
Anti-slip properties on wet surfaces– Walking method–Ramp test	DIN 51097	< 12	0
		≥ 12°	A
		≥ 18°	B (A+B)
		≥ 24°	C (A+B+C)

Slip resistance of ceramic tiles – Pendulum test

Slip resistance of ceramic tiles is a technical characteristic, which is important for floor tiles coming in contact with water and with high potential slipping characteristic level. Slip resistance of ceramic tile is tested with testing method called Pendulum test, PTV. The device for determining slip resistance measures the friction coefficient directly and indirectly between the material of the flooring base and material representing the sole of the shoe.

Slip resistance class	$PTV_{DRY\ OR\ WET}$	Description
1	0–24	High possibility of slip
2	25–35	Moderate possibility of slip
3	36 +	Low possibility of slip

PTV_{DRY} – slip resistance of tile on dry surface
PTV_{WET} – slip resistance of tile on wet surface

TECHNICAL INFORMATIONS

Visual appearance of tiles and selection of tiles considering the place of installation

- When selecting the tiles, next to the visual characteristics of the tile (colour, decor, texture, decorative elements,...) the technical characteristics of the tiles must be taken into account.
- In Annex to standard SIST EN 14 411, minimum technical requirements concerning technical characteristics of the tiles are defined: dimensions, quality of visual surfaces, physical and chemical characteristics.
- Conformity of ceramic tiles has been tested in accordance with European standard and their characteristics must be listed by the manufacturer. Test methods used for defining the characteristics of the ceramic tiles are defined in standards EN ISO 10 545.
- All characteristics are identified on the cardboard box and in the Declaration of Performance (DoP), a document which is the main source of information for the buyer.

Packaging, marking, identification and storage of the product

- The Gorenje Keramika tiles are automatically sorted by quality classes and packaged in cardboard packaging.
- Packaging unit for ceramic tiles (box) includes all data required for identification of the product: dimensions and name of the tile, caliber, shade, date of manufacture, packaging quantity (m^2 or number of pcs.).
- The caliber defines permitted dimension tolerance between the actual dimension and the manufacturing dimension of the tile. The size of the tile defined for manufacture is called manufacturing dimension.
- In accordance with standard EN 14411 the minimum changes in colour are inevitable during the manufacturing process. When buying the tiles, be careful and make sure that all the tiles used for installation on one surface have the same shade.
- Upon the request of the buyer, a special 13 digit EAN barcode can be printed on the box. The tiles are packaged into cardboard box and stacked on the pallet.
- In order to assure the product keeps its characteristic features, the tiles must be stored in original packaging until the installation.
- Handling/manipulation with the tiles other than recommended/appropriate, may cause damages to the product (breach, chipping, fissures,...).
- If the product is to be stored outdoors for a longer period of time, make sure it is properly protected against freezing.

NAVODILA IN NASVETI

Navodila za vgradnjo

Za pravilno in skrbno vgradnjo keramičnih ploščic Gorenje Keramika je treba upoštevati:

- Pred vgradnjo keramičnih ploščic preverite kaliber, nianso in kakovost izdelka.
- Priporočljivo je, da se pri vgradnji vedno pomešajo keramične ploščice iz različnih škatel. Da preprečite neustrezen videz vgrajenih keramičnih ploščic, jih predhodno namestite na mesto vgradnje in jih vgradite le, če ste zadovoljni z nastalim vzorcem.
- Preberite opozorila na kartonski embalaži in jih upoštevajte.
- Stenske ploščice pred vgradnjo namočite v vodi.
- Uporabite primerno orodje za vgradnjo keramičnih ploščic (rezalko z diamantnim rezilom, zobato lopatico, belo gumijasto kladivce, klešče za keramične ploščice, gumijasto lopatico za fugiranje).
- Poskrbite, da je površina, na katero se bodo vgradile keramične ploščice, ravna, čista in zaščitena pred vlago in očiščena vseh nečistoč (npr. oplesk,..)
- Posebno pozornost namenite izbiri lepila, ki ga boste uporabili (posvetujte se z dobavitelji ali proizvajalci lepila). Vsak tip keramičnih ploščic zahteva ustrezno lepilo. Dosledno upoštevajte navodila proizvajalcev lepil o debelini sloja lepila.
- Lepilo enakomerno nanesite na podlago v sloju, kot ga predpiše proizvajalec lepila. Priporočamo, da lepilo na zadnjo stran keramične ploščice nanesete in utrete po celotni površini. Sloj lepila ne sme biti debelejši, kot jo predpiše proizvajalec lepila.
- Da zagotovite pravilno vgradnjo, priporočamo uporabo vodne tehtnice.
- Za zatesnjevanje vseh robnih spojev na zidnih in talnih površinah je potrebno uporabiti sanitarni silikon. Posebej to velja pri polaganju talnih ploščic na spiralo talnega gretja, kjer po vključitvi talnega gretja prihaja do raztezanja materialov.
- Strokovnjak za polaganje keramičnih ploščic mora izbrati ustrezno velikost fug, da se zagotovi ustrezna struktura vzorca znotraj dovoljenih dimenzijskih odstopanj. Gorenje Keramika priporoča vgradnjo keramičnih ploščic z minimalno fugo 1,5 mm.
- Ne uporabljajte neobstojnih barvnih fugirnih mas ali barvil (topna v vodi). Takšni materiali lahko otežijo čiščenje vgrajenih keramičnih ploščic.
- Takoj po vgradnji keramičnih ploščic, preden se fugirna masa in lepilo zasušita, očistite površino keramičnih ploščic z gobico in čisto vodo. Nikoli ne uporabljajte trdih materialov, s katerimi bi lahko poškodovali površino keramičnih ploščic (kovinske lopatice, abrazivna čistilna sredstva,...). Vedno upoštevajte pravila, ki jih priporoča proizvajalec lepila.

Fugiranje

- Pred nanosom fugirne mase je treba počakati najmanj 24 ur od vgradnje keramičnih ploščic.
- Iz fug je treba očistiti vse ostanke lepila in ostalo umazanijo.
- Fugirna masa se nanaša s trdo, ostro, gumijasto lopatico za fugiranje.
- Fugirne linije je treba očistiti z vlažno gobo pred strditvijo fugirne mase.

Reklamacije

- Kupec je ob prevzemu dolžan preveriti ustreznost paketov. Za poškodovane izdelke, ki se poškodujejo med kasnejšim transportom ali pri nepravilnem rokovanju, ne priznavamo reklamacij.
- Reklamacije glede kakovosti, nianse ali neustreznih dimenzij mora kupec prijaviti pred vgradnjo.
- Reklamacija za vgrajene keramične ploščice se ne priznava, razen v primeru skritih napak na izdelku. Skrita napaka je napaka, ki se pokaže potem, ko je kupec prevzel izdelek in je z običajnim pregledom pri prevzemu ni bilo mogoče opaziti. V primeru, da ima izdelek skrito napako, lahko kupec reklamacijo prijavi v roku dveh mesecev od dneva, ko je bila napaka odkrita, oziroma v roku 2 let od dneva nakupa. Ob prijavi reklamacije je potrebno obvezno priložiti original račun o nakupu ploščic, original račun od polagalca storitve polaganja in kartonsko embalažo.
- Priporočamo, da kupec za primer reklamacije shrani vsaj eno keramično ploščico ter kartonsko embalažo.

Kupcu se reklamacija ne prizna, če:
- pri vgradnji glaziranih porcelanskih ploščic ni uporabil izravnalnega sistema;
- je nepravilnost na keramičnih ploščicah nastala zaradi njegovega neustreznega ravnanja;
- je keramične ploščice vgradila nestrokovna oseba;
- so bile keramične ploščice uporabljene na drug način, kot je njihov namen;
- niso bila upoštevana navodila in opozorila.

Kontakt: keramika@gorenje.com

NAVODILA IN NASVETI

Navodila za vzdrževanje in čiščenje

Če se ploščice ne morejo popolnoma očistiti, v tabeli navajamo primerna čistila za različne tipe umazanije.

Ko so ploščice položene in fugirane, je priporočljivo, da se s površine odstrani odvečno lepilo in fugirna masa. Čiščenje mora biti izvedeno v 24 urah po vgradnji (fugirna masa mora biti popolnoma posušena) in najkasneje 2 dni po vgradnji, ker je kasneje čiščenje oteženo.

TIP MADEŽA	ČISTILNA SREDSTVA
Olje, črnilo, marker pisalo, paradižnik, sadje, čokolada, maščoba	Organska topila: alkohol, terpentin, aceton, alkalni detergenti v tekočem stanju ali v obliki prahu bikarbonata
Katran, guma, krema za čevlje, barva, grafit, vosek, lak za nohte	Organska topila: alkohol, terpentin, aceton, alkalni detergenti v tekočem stanju ali v obliki prahu bikarbonata
Kava, sladoled, nikotin, vino	Alkalni detergenti v tekočem stanju ali v obliki prahu bikarbonata
Apno, cement, pivo, brezalkoholne pijače, sadni sokovi, vodni kamen	Kis, razredčena klorovodikova kislina
Lepilo, žvečilni gumi, odtis gume s podplata čevlja	Organska topila: alkohol, terpentin, aceton, razredčena klorovodikova kislina
Kri, jod	Oksidant: kisikova voda

Poškodbe na površini ploščic so običajno posledica uporabe:
- agresivnih čistilnih sredstev (visoka koncentracija),
- čistilnih sredstev, neprimernih za čiščenje keramičnih ploščic.

Nikoli ne uporabljajte čistil, ki so izdelana na osnovi fluorovodikove kisline ali njenih derivatov (izdelki za preprečevanje rje in sredstva za odstranjevanje madežev v spreju pogosto vsebujejo fluorovodikovo kislino). Fluorovodikova kislina na površini ploščic povzroči nepopravljivo škodo. Vse izdelke, ki so navedeni v tabeli, najdete v običajnih trgovinah in trgovskih centrih.

Splošno pravilo je, da višji razred drsnosti keramičnih ploščic pomeni težje čiščenje. Prosimo, da to upoštevate pri izbiri keramičnih ploščic.

Čiščenje dekornih keramičnih ploščic

Za doseganje elegantnega visokokakovostnega videza pri dekornih keramičnih ploščicah (sredinski dekorji, listeli) uporabljamo prefinjene tehnike z uporabo žlahtnih materialov (zlato, srebro, platina), zato zahtevajo posebno skrbnost tako pri vgradnji kot čiščenju.

Priporočamo, da za čiščenje uporabljate samo mehko krpo in vodo. Izogibajte se uporabi močnih, abrazivnih čistil tako pri čiščenju fugirne mase po končani vgradnji kot pri vsakodnevnem čiščenju.

Opomba

Dejanski izgled ploščic se lahko razlikuje od slik v tem katalogu. Ploščice, proizvedene s tehnologijo digitalnega dekoriranja, imajo različna lica. Kljub skrbnosti ne moremo zagotavljati, da objavljene informacije ne vsebujejo pomanjkljivosti ali napak. Pridržujemo si pravico do spremembe programa.

Vsebine, objavljene v tem katalogu, so v lasti družbe Gorenje Keramika d.o.o. in so v zakonsko dovoljenem okviru predmet avtorske zaščite ali druge oblike zaščite intelektualne lastnine. Navedene vsebine so lahko reproducirane le v nekomercialne namene in se jih ne sme spreminjati ali drugače uporabljati, razen tako, kot je določeno v tem besedilu. Vsebin (vključno s fotografijami), objavljenih v tem katalogu, se ne sme prepisovati, razmnoževati ali kako drugače razširjati v komercialne namene brez predhodnega izrecnega pisnega dovoljenja družbe Gorenje Keramika d.o.o..

Gorenje Keramika d.o.o. si pridržuje vse pravice do spremembe vsebin, objavljenih v tem katalogu.

INSTALLATION GUIDE AND ADVICE

Instructions for installation

In order to assure correct and precise installation of the ceramic tiles Gorenje Keramika, please follow the instructions:

- Before installation, check the caliber, shade and quality of the product.
- We recommend mixing of tiles from various boxes. In order to prevent unwanted appearance of the installed tiles, we recommend arranging the tiles at the place of installation and proceeding with installation after the pattern meets your expectations.
- Read and follow the warnings printed on the cardboard box.
- Before installation, soak wall tiles in water.
- Use appropriate tools for installation of ceramic tiles (diamond blade cutter, square-notch trowel, white rubber mallet, tile nipper and rubber grout float).
- Make sure that the surface, onto which the tiles are to be installed, is flat, clean, protected against moisture and free from all impurities (e.g. paint).
- Special attention should be paid to selecting the correct adhesive (consult the adhesives suppliers or manufacturers). Each type of ceramic tiles requires a different type of adhesive. Strictly follow the instructions on the thickness of the adhesive layer as prescribed by the manufacturer.
- Apply the adhesive evenly on the surface in a layer prescribed by the manufacturer. It is recommended that the adhesive be applied to the back of the ceramic tile and spread over the entire surface. The layer of the adhesive should not exceed the thickness prescribed by the manufacturer.
- To ensure correct installation, we recommend the use of a bubble level.
- To seal all edge joints on wall and floor surfaces, bathroom silicone should be used. This is especially true in the case of installing wall tiles on the floor heating pipe, where expanding of materials occurs after the floor heating is turned on.
- A qualified tile installer should select proper dimension of the grouting, in order to ensure the proper structure of the pattern within the permitted discrepancies. Gorenje Keramika recommends installation of ceramic tiles with the minimum grouting of 1.5 mm.
- Do not use coloured grouting materials or pigments that are water soluble. Such materials may cause problems during cleaning of the installed ceramic tiles.
- Immediately after installation of the tiles, before the grouting material and adhesive are hardened, clean the surface of the tiles with sponge and clean water. Do not use hard materials which might cause damage to the surface of the tiles (metal trowels, abrasive cleaning agents...). Always follow the instructions provided by the manufacturer of the adhesive.

Grouting

- Before application of grouting mix wait for minimum 24 hours after the installation of the tiles.
- Always cleanse the residues of the grouting mix and any other residues from the surface of the tiles.
- Apply the grouting mix using a solid, sharp rubber grouting trowel.
- Before the grouting mix solidifies, clean the grouts with damp cloth.

Complaints

- Upon acceptance, the buyer must inspect the boxes. Any damages which might be caused during the transport or incorrect handling, can not be subject to complaints.
- Complaints concerning the quality, shades or inadequate dimensions must be made before the tiles are installed.
- No complaints whatsoever can be made once the tiles are installed, except in case of hidden defects. A hidden defect is a defect identified after the buyer accepted the product and which could not have been identified with standard inspection upon acceptance. In case of hidden defect, the buyer shall have the right to file the complaint within two months from the date of identifying the defect, or within 2 years after the date of purchase. Upon filing a complaint, an original purchasing invoice, the original invoice from the tile paver service and factory packaging must be enclosed.
- We recommend to the buyer to save at least one piece of the tiles and cardboard box for the case of complaint.

The complaint of the buyer shall not be considered legitimate in any of the following cases:
- If the buyer did not use a levelling system when installing glazed porcelain tiles;
- If the defect/damage has been caused to the tile by the fault of the buyer's mishandling;
- If the ceramic tiles were not installed by a qualified tile installer;
- If the ceramic tiles were used in a manner other than recommended;
- In case of failure to observe the provided instructions and warnings.

Contact: keramika@gorenje.com

INSTALLATION GUIDE AND ADVICE

Instructions for maintenance and cleaning

If you find the tiles hard to be cleaned, please refer to the Table to find appropriate cleaning agents for different types of dirt.

Once the ceramic tiles are installed and grouted, we recommend cleansing any access grouting mix from the surface of the installed tiles. The tiles must be cleansed within 24 hours after installation (the grouting mix must be fully dried) or within 2 days at latest after installation, later on, it will be extremely hard to remove the residues.

STAIN TYPE	CLEANING AGENTS
Oil, ink, felt pen, tomato, fruits, chocolate, grease	Organic solvents: alcohol, turpentine oil, acetone, liquid alkaline detergents or bicarbonate powder
Tar, rubber, shoe polish, colour, charcoal, wax, nail polish	Organic solvents: alcohol, turpentine oil, acetone, liquid alkaline detergents or bicarbonate powder
Coffee, ice cream, nicotine, wine	Liquid alkaline detergents or bicarbonate powder
Lime, cement, beer, soft-drinks, fruit juices, limescale	Vinegar, diluted hydrochloric acid
Glue, chewing gum, marks from rubber soles	Organic solvents: alcohol, turpentine oil, acetone, diluted hydrochloric acid
Blood, iodine	Oxidizing agent: Oxygenated water

Damages to the surface of the ceramic tiles are usually the consequence of using any of the following agents:
- Aggressive cleaning agents (heavily concentrated),
- Cleaning agents which are not appropriate for ceramic tiles.

Never use cleaning agents made on the basis of hydrofluoric acid or its derivatives (e.g. rust control products or stain removal sprays often contain hydrofluoric acid). Hydrofluoric acid will cause irreparable damage to the surface of the tile. All products listed in the Table are available in stores.

As a general rule, the higher the slip resistance class, the harder is cleaning. Please take into account this fact when selecting the right tile for your intended use.

Cleaning of decorating tiles

To assure the elegant high-end appearance of the decorative tiles (central decors, listello tiles), we use sophisticated technique using precious material (gold, silver, platinum), therefore those tiles require special care in installation and cleaning.

We recommend cleaning with cloth and water only. Do not use aggressive, coarse cleaning agents, either for removal of grout residues after installation or for regular daily cleaning.

Note:

Actual visual appearance of the ceramic tiles may differ from the pictures shown in this brochure. The tiles manufactured with the technology of digital decorating have different face sides. In spite of taking great care, we cannot guarantee that the technical characteristics will not contain any errors. We reserve the right to make changes to the product range.

Contents published in this brochure are the property of the company Gorenje Keramika d.o.o. and are under applicable law copyright protected or are subject to protection of intellectual rights. The content may be reproduced only for non-commercial purpose and must not be modified or used in any way other than recommended in this document. The content (including photographs published in this brochure) may not be copied, reproduced or any other way communicated to commercial purpose without previous explicit consent of the company Gorenje Keramika d.o.o..

Gorenje Keramika d.o.o. reserves the right to changes made to the content published in this brochure.

PRIPOROČENI NAČINI POLAGANJA

Laying solutions

Predlog za polaganje glaziranih porcelanskih ploščic.
Suggestion on installation of glazed porcelain tiles.

Priporočamo polaganje ploščic z največ 30% zamikom.
We recommend installing tiles with a maximum of 30% offset.

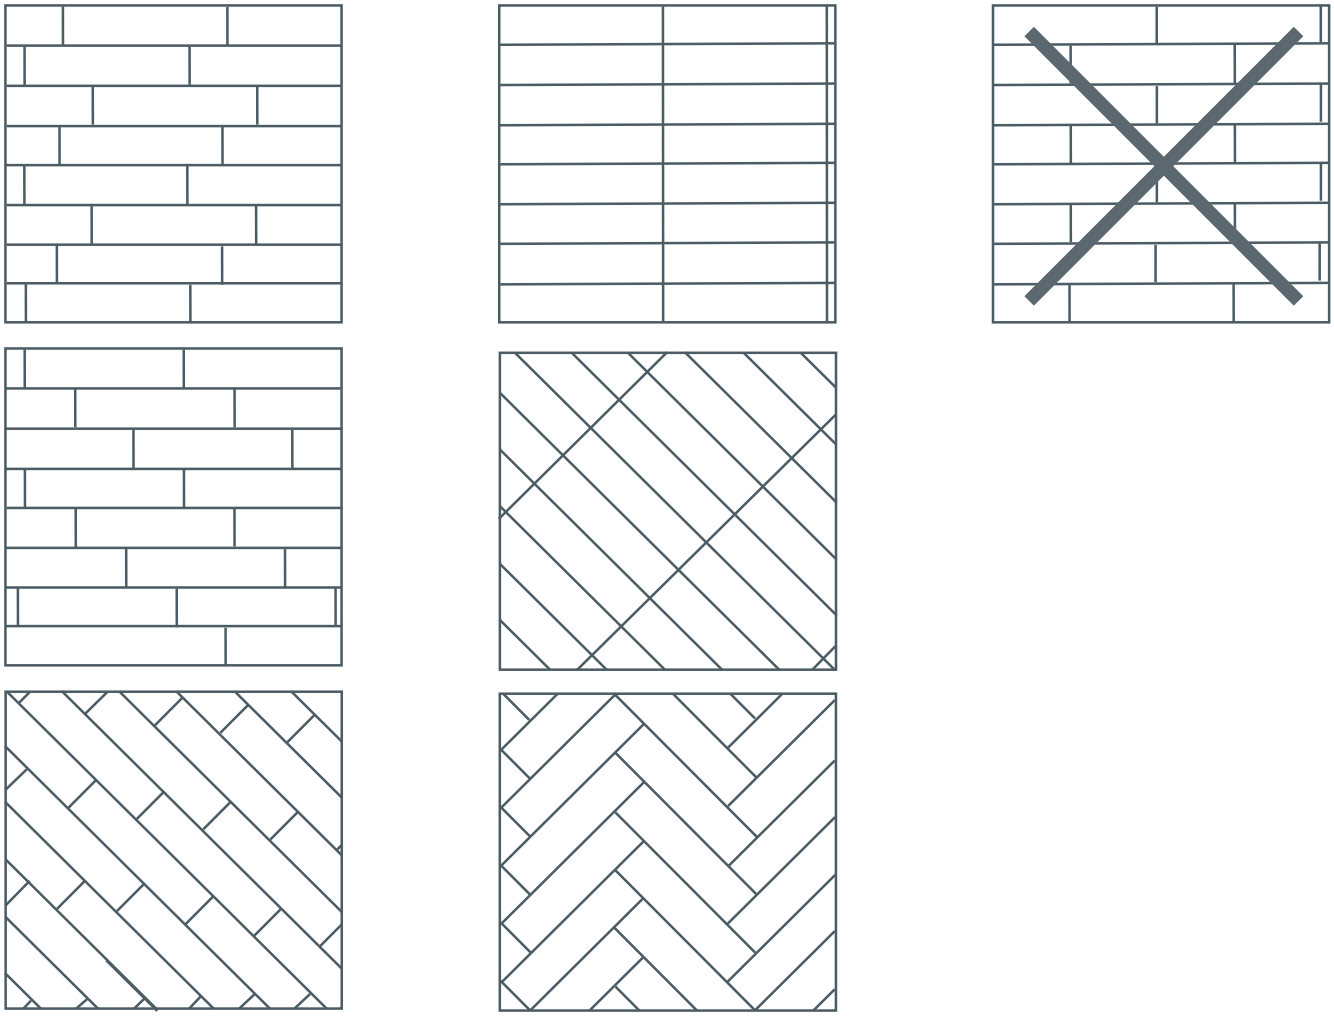

OBVEZNA UPORABA IZRAVNALNEGA SISTEMA ZA VGRADNJO GLAZIRANIH PORCELANSKIH PLOŠČIC. Gorenje Keramika ne prizna reklamacij v primeru neuporabljenega izravnalnega sistema pri vgradnji tega tipa pločic.

MANDATORY USE OF LEVELING SYSTEM FOR THE INSTALLATION OF GLAZED PORCELAIN TILES.
Gorenje Keramika will not accept any claims if this type of tiles are installed without a leveling system.

Nudimo široko paleto formatov. Po najnovejših trendih v keramiki, dimenzije ploščic postajajo vse večje. Prednost glaziranih porcelanskih ploščic je v materialu, ki omogoča veliko večjo prožnost, hkrati pa ohranjaja trdnost. Na trgu obstajajo posebni vgradni sistemi za enostavnejšo namestitev te vrste izdelka. S temi sistemi je mogoče premagati neenakost tal in uravnati ukrivljenost kosov, zato Gorenje Keramika za popolna tla predlaga uporabo izravnalnega sistema s katerim pridobimo na času in se izognemo nepravilnostim v tleh.

We offer a wide range of formats. Following the latest trends in flooring, the formats are getting larger.
The advantage of glazed porcelain tiles is that they have a much greater flexibility while maintaining the values of hardness and breaking strength. They are specific fitting systems on the market for easier installation of this type of product. With these systems, we are able to overcome the unevenness of the floor and accommodate the curvature of the pieces getting a much flatter surface. Gorenje Keramika, recommends the use of a leveling system to optimize installation time, avoid irregularities in the floor and get a perfect finish.

LOGISTIČNI PODATKI
Logistic data

Pakiranje gotovih izdelkov
Packing of finished products

Stenske ploščice Skupina BIII / Wall tiles Group BIII								
OPIS / DESCRIPTION								
	cm	mm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	20x50	8,5	18	1,80	26,80	44	79,20	1.180
	25x60	9,0	9	1,35	20,60	64	86,40	1.320
	25x75	9,2	8	1,50	23,30	42	63,00	980

Stenske ploščice - Sredinski dekorji / Wall tiles - Central decors / DC								
OPIS / DESCRIPTION								
	cm	mm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
DC	20x50	8,5	18	1,80	26,80	22	39,60	590
	25x60	9,0	9	1,35	20,00	32	43,20	640
	25x75	9,2	8	1,50	23,20	28	42,00	650
DC	20x50	8,5	15	1,50	22,30			
	25x60	9,0	9	1,35	20,80			

3D stenske ploščice - Sredinski dekorji / 3D wall tiles - Central decors								
OPIS / DESCRIPTION								
	cm	mm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
3D	20x50	9,5	16	1,60	26,80	22	35,20	590
	25x60	10,0	8	1,20	19,90	32	38,40	640
	25x75	10,5	7	1,31	23,20	28	36,68	650

Glazirane porcelanske ploščice Skupina BI_a / Glazed porcelain tiles Group BI_a								
OPIS / DESCRIPTION								
	cm	mm	kos / pcs	m² / Mq	kg	paketov / boxes	m² / Mq	kg
	15x60	8,8	10	0,90	17,70	64	57,60	1.130
	30x60	8,8	7	1,26	23,00	40	50,40	920
	22,5x90	8,8	6	1,215	23,10	54	65,61	1.250

LOGISTIČNI PODATKI
Logistic data

Pakiranje gotovih izdelkov
Packing of finished products

Talne ploščice Skupina BII_b / Floor tiles Group BII_b								
OPIS / DESCRIPTION								
	cm	mm	kos / pcs	m^2 / Mq	kg	paketov / boxes	m^2 / Mq	kg
	33,3 ˙x33,3 ˙	8,0	12	1,33	22,20	72	96,00	1.600

Stenske ploščice - Listele / Wall tiles Listellos / L					
OPIS / DESCRIPTION					
	cm	mm	kos / pcs	m	kg
L	8x50	8,4	12	6,00	8,20
	5x50	8,4	12	6,00	5,00
	4,5x60	9,0	12	7,20	5,80
	5x60	9,0	12	7,20	6,00
	6x60	9,0	12	7,20	7,50

Stenski mozaiki / Wall mosaics				
OPIS / DESCRIPTION				
	cm	kos / pcs	m^2 / Mq	kg
	30x30	11	0,98	14,50
	20x60	10	0,97	14,60

Porcelanski mozaiki / Porcelain mosaics				
OPIS / DESCRIPTION				
	cm	kos / pcs	m^2 / Mq	kg
	30x30	11	0,98	16,60
	30x60	5	0,75	10,60
	33,8x36,4	10	0,97	15,60

DODATNE INFORMACIJE
Additional information

Tehnični načrt mozaikov
Technical design for mosaics

Mosaic 1

Mosaic 5



Mosaic 4

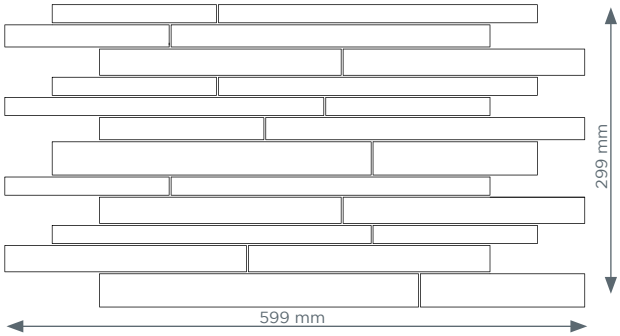

Mosaic 6

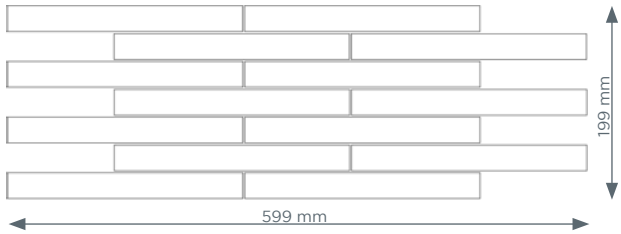

Mosaic 7

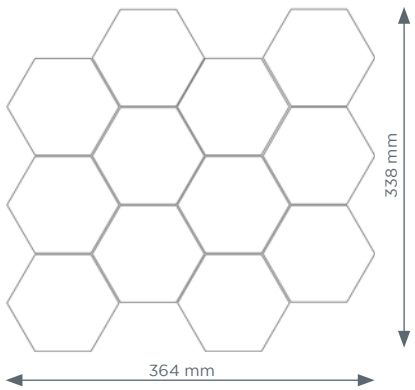

gorenje KERAMIKA

Gorenje Keramika, d.o.o.

Sedež/Headquarters: Partizanska cesta 12, 3320 Velenje, Slovenija
Lokacija/Location: Gorenje 1/b, 3327 Šmartno ob Paki, Slovenija
T: +386 (0)3 896 61 10
F: +386 (0)3 896 61 13
E: keramika@gorenje.com
W: https://si.gorenje.com/izdelki/keramika
https://ceramics.gorenje.com/en/

Industrijska prodajalna Šmartno ob Paki
Gorenje 1/b,
3327 Šmartno ob Paki, Slovenija
T: +386 (0)3 896 61 27
F: +386 (0)3 896 61 13
E: ip.keramika.gorenje@gorenje.com

Industrijska prodajalna Ljubljana
Plemljeva 2
1210 Ljubljana-Šentvid, Slovenija
T: +386 (0)1 512 48 71
F: +386 (0)1 516 15 57
E: ip.keramika.ljubljana@gorenje.com

Prodajni salon Lenapark
Ob Poleni 35 (Lenapark)
2230 Lenart v Slovenskih goricah, Slovenija
T: +386 (0)2 292 79 86, +386 (0)2 292 79 87
F: +386 (0)2 292 79 88
E: ps.keramika.lenart@gorenje.com

TILE BOOK
2020

Gorenje Keramika, d.o.o.

Sedež/Headquarters: Partizanska cesta 12,
3320 Velenje, Slovenija
Lokacija/Location: Gorenje 1/b,
3327 Šmartno ob Paki, Slovenija
T: +386 (0)3 896 61 10
F: +386 (0)3 896 61 13
E: keramika@gorenje.com
W: https://si.gorenje.com/izdelki/keramika
https://ceramics.gorenje.com/en/

Made
in
Slovenia